


4K 18Gbps HDMI Extender via One LC Singlemode or Multimode Fiber Optic Cable

XTENDEX®

Extend an Ultra-HD 4Kx2K 60Hz 4:4:4 HDMI display up to 3,280 feet (1,000 meters)

- Signal transmission via single-strand singlemode or multimode LC fiber optic cable.
 - Using singlemode 9-micron cable, extend to 3,280 feet (1,000 meters).
 - Using multimode 50-micron cable, extend to 984 feet (300 meters).
- Supports Ultra-HD 4Kx2K resolutions to 3840x2160 and 4096x2160 @30/50/60Hz YUV 4:4:4, and HDTV resolutions to 1080p @120Hz.
- HDMI features supported:
 - HDMI 2.0
 - 8-bit, 10-bit, and 12-bit Deep Color
 - Dolby TrueHD, DTS-HD Master Audio, Dolby Digital, Dolby Digital+, Dolby Atmos, LPCM 2/5.1/7.1CH, DTS 5.1, and DTS:X
 - YUV 4:4:4, 4:2:2, and RGB
 - Bandwidth up to 600 Mhz (18Gbps)
 - 3D (1080p @60Hz)
- HDCP 2.2 and 1.4 compliant.
- Bi-directional IR control from input and output locations.
- Support full-duplex RS232 up to 115200 baud.
- Plug-and-play functionality - no software needed.
- Low RFI/EMI for sensitive applications.
- Cables can be installed in conduit prior to extender installation.
- Integrated mounting brackets for easy surface/wall mounting.

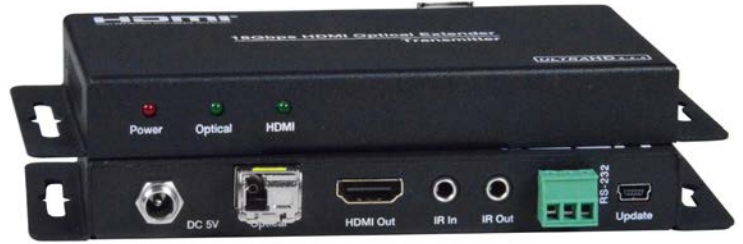


XTENDEX® ST-FO4K18GB-RS-LC (Local and Remote Unit)

- Resolutions to Ultra-HD 4Kx2K 60Hz 4:4:4
- 18Gbps bandwidth
- HDMI 2.0
- IR, RS232 control

The XTENDEX® 4K 18Gbps HDMI Extender via Fiber Optic Cable locates an Ultra-HD 4Kx2K 60Hz 4:4:4 HDMI display, IR and RS232 up to 3,280 feet (1,000 meters) away from a 4K HDMI source using a single LC singlemode fiber optic strand and 984 feet (300 meters) using multimode fiber optic cable. Each extender consists of a transmitter that connects to an HDMI source, and a receiver that connects to an HDMI display.

Configuration and Cable Illustration

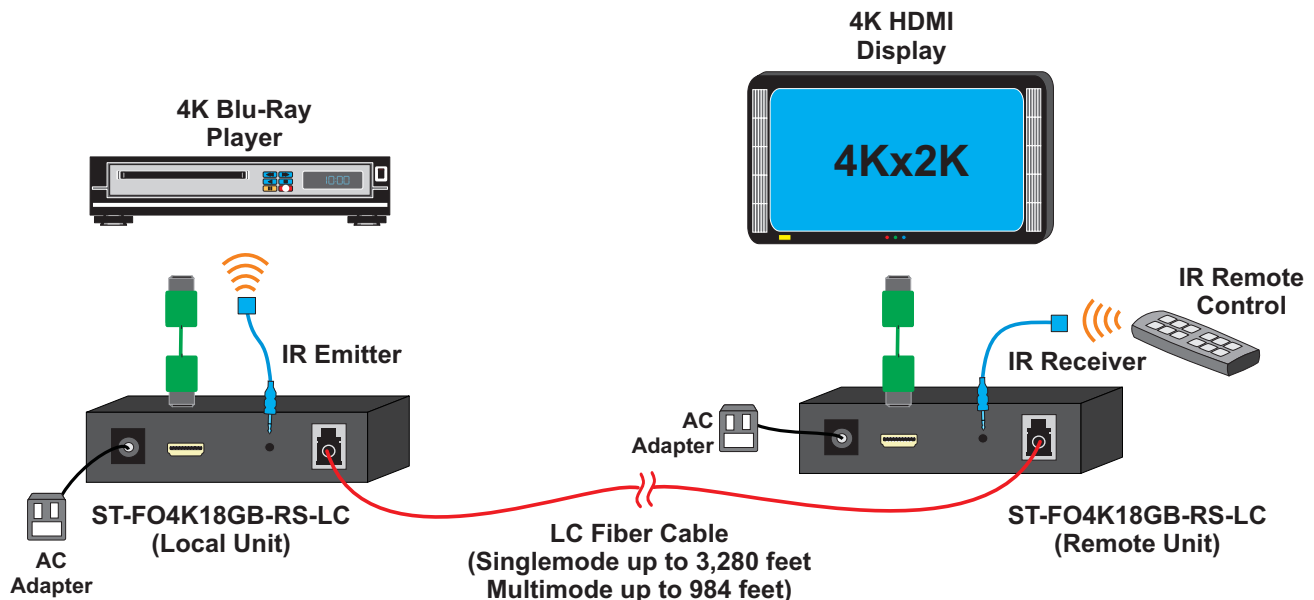

4K 18Gbps HDMI Extender via One LC Singlemode or Multimode Fiber Optic Cable

XTENDEX®

Extend an Ultra-HD 4Kx2K 60Hz 4:4:4 HDMI display up to 3,280 feet (1,000 meters)

Specifications

Local Unit

- One female HDMI connector for source.
- Two female 3.5mm ports for connecting an IR emitter and receiver (included).
 - IR frequency: 20KHz to 60KHz
- 3-pin screw terminal for RS232.
 - Support full-duplex RS232 up to 115200 baud.
- One simplex female LC fiber optic port for sending video/audio, IR, and RS232 signals.
- Female 5-pin USB Mini Type B connector for firmware updates.
- Supports HDCP 2.2 and 1.4

Remote Unit

- One female HDMI connector for display.
- Two female 3.5mm ports for connecting an IR emitter and receiver (included).
 - IR frequency: 20KHz to 60KHz
- 3-pin screw terminal for RS232.
 - Support full-duplex RS232 up to 115200 baud.
- One simplex female LC fiber optic port for sending video/audio, IR, and RS232 signals.
- Female 5-pin USB Mini Type B connector for firmware updates.
- Supported video resolutions:
 - Ultra-HD 4Kx2K60Hz 4:4:4 resolutions (4096x2160 and 3840x2160 @30/50/60Hz)
 - HDTV resolutions to 1080p (1080p@120Hz, 1080p 3D@60Hz).
- Supports HDCP 2.2 and 1.4
- Max data rate: 18Gbps

Power

- Local and remote unit: 100 to 240 VAC at 50 or 60Hz via AC adapter.
- Input voltage: 5VDC
- Power consumption: 3W each.

Environmental

- Operating temperature: 32 to 104°F (0 to 40°C).
- Storage temperature: -4 to 140°F (-20 to 60°C).
- Operating and storage relative humidity: 20 to 90% non-condensing RH.

Dimensions

- WxDxH (in): 6.26x2.64x0.7 (159x67x17.78 mm)

Regulatory Approvals

- CE, FCC, RoHS

Warranty

- Two years

Max Distance

- 3,280 feet (1,000 meters) over singlemode 9/125-micron LC simplex fiber optic cable.
- 984 feet (300 meters) over multimode 50/125-micron OM3 LC simplex fiber optic cable.

Cables

- Interface cables between the video source/display and the transmitter/receiver are required for proper operation.
 - Supports cable lengths to 20 feet.
 - Cables longer than 20 feet can be used provided they have a built-in video equalizer (also known as “active HDMI cables”).
- Use HD-xx-MM cable to connect an HDMI source or display (not included).
- Use DVI-HD-xx-MM cable to connect a DVI source or display (not included).
- Use HD-RM-xx-MM 4K HDMI RedMere Active Cables to connect an HDMI source or display up to 100 feet.
 - Supports resolutions to 4K@30Hz.
- Use a simplex LC singlemode 9/125-micron fiber optic cable to extend the receiver from the transmitter up to 3,280 feet (1,000 meters).
- Use a simplex LC multimode 50/125-micron OM3 fiber optic cable to extend the receiver from the transmitter up to 984 feet (300 meters).
- Cables not included.

Package Includes

- One transmitter unit
- One receiver unit
- One fiber transmitter module
- One fiber receiver module
- Two IR emitters
- Two IR receivers
- Two power supplies
- Two screw terminal pairs for RS232
- User manual