

ENVIROMUX-SDS-PA SMOKE DETECTION SENSOR

Installation Instruction



The ENVIROMUX-SDS-PA is a smoke detection sensor intended for connection to an NTI ENVIROMUX-MINI or ENVIROMUX-MINI-LXO (ENVIROMUX) for use in detecting smoke in a server cabinet environment. When properly connected, the ENVIROMUX-SDS-PA will provide signals to the ENVIROMUX that with proper configuration will result in alert messages being sent to the administrator of the ENVIROMUX. The ENVIROMUX-SDS-PA has screw terminals for easy user connections and includes a 12VDC AC adapter.

Installation

1. Connect two 18-22 awg wires (not supplied) from any set of dry contacts (see below) on the ENVIROMUX-MINI (set 1, 2, 3, or 4) or "Digital In" terminals on the ENVIROMUX-MINI-LXO (sets 1-5).
2. Connect the other end of those two wires to the switch terminals "C" and "N/O" on the smoke detection sensor.
3. Connect the AC adapter wire labeled "PLUS 12" to the terminal marked "12VDC" on the smoke detection sensor.


Note: DO NOT connect to the terminal labeled "24VDC".

4. Connect the AC adapter wire labeled "NEG" to the terminal labeled "-" (negative) on the smoke detection sensor.
5. Be sure to tighten terminals to secure each conductor to the terminal block.
6. Mount the ENVIROMUX-SDS-PA where smoke detection is desired.


VIEW OF TERMINAL BLOCK ON REAR OF ENVIROMUX-SDS-PA



DO NOT CONNECT THE AC ADAPTER TO THE 24VDC TERMINAL.

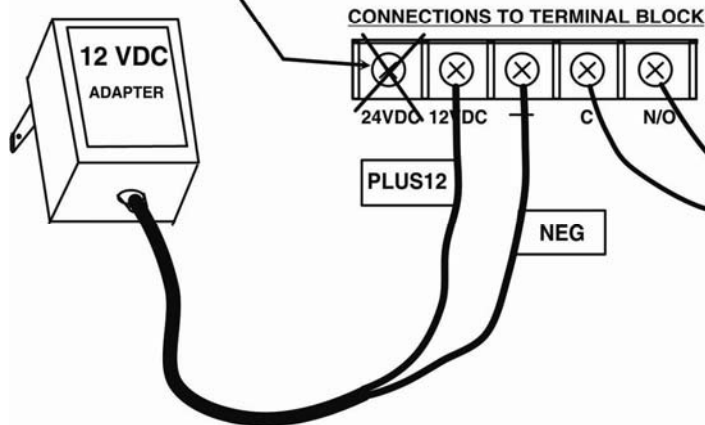



VIEW OF DRY CONTACTS ON ENVIROMUX-MINI



CONNECT THE SMOKE SENSOR "C" AND "N/O" TERMINALS TO ANY SET OF DRY CONTACTS ON THE ENVIROMUX-MINI (1-4)

18-22AWG WIRES (NOT SUPPLIED)

VIEW OF TERMINALS ON ENVIROMUX-MINI-LXO

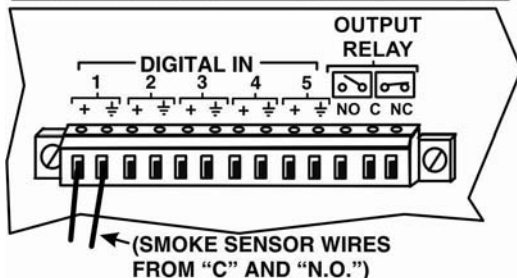

Top View of ENVIROMUX-SDS-PA

Operation

1. Connect the AC adapter to a 120VAC power source. The LEDs on the ENVIROMUX-SDS-PA will illuminate green to indicate the sensor is functioning and in status-ready condition. The LEDs will illuminate red when smoke is detected.
2. Configure the ENVIROMUX to report signals from the connected dry contact sensor as smoke detection sensor alerts. (Refer to ENVIROMUX manual for details on configuration- see also example on next page.) When smoke is detected, the switch terminals on the ENVIROMUX-SDS-PA will close to generate an alert message from the ENVIROMUX.

For maintenance and testing instruction, see the instructions that are included from the sensor manufacturer with this kit.

Dry Contact Sensor Configuration

Name:

Thresholds Alert when: <input type="text" value="Closed"/>	Alert Timing Alert hysteresis: <input type="text" value="5"/> seconds Notify again after: <input type="text" value="1"/> hours	<input checked="" type="checkbox"/> Notify on return to normal
--	---	--

E-mail
Notify addresses:

(separate by commas, max 112 characters)

SNMP
Notify address:

 Syslog
Notify address:

Message to send with alerts (optional):

(max 160 characters)

Disable alerts for this sensor

Example of sensor configuration in ENVIROMUX-MINI

Digital Input Configuration

Digital Input Settings

Description:
Descriptive name for the digital input

Group:
Select which group the digital input belongs to

Normal Status:
Select the normal status for the digital input

Refresh Rate: Sec
The refresh rate at which the digital input view is updated

Alert Settings

Data Logging

Alert Simulation

Example of sensor configuration in ENVIROMUX-MINI-LXO

Warranty Information

The warranty period on this product (parts and labor) is two (2) years from the date of purchase. Please contact Network Technologies Inc at **(800) 742-8324** (800-RGB-TECH) or **(330) 562-7070** or visit our website at <http://www.networktechinc.com> for information regarding repairs and/or returns. A return authorization number is required for all repairs/returns.

COPYRIGHT

Copyright © 2007, 2012 by Network Technologies Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Network Technologies Inc, 1275 Danner Drive, Aurora, Ohio 44202.

CHANGES

The material in this guide is for information only and is subject to change without notice. Network Technologies Inc reserves the right to make changes in the product design without reservation and without notification to its users.