

# Component Video to DVI Converter/Extender via Fiber Cable to 1,640 ft

## VIDEO CONVERTERS

### Converts component video to DVI video and extends up to 1,640 feet

- Convert a video source with analog VGA signal to a digital DVI signal.
- Convert a video source with component video signal to an digital DVI signal.
- Use with an optical receiver (ST-1FODVI-R-SC500M) to extend a remote DVI monitor 1,640 ft (500m).
  - Signal transmission via a single-strand (simplex) multimode (50-micron or 62.5 micron) SC fiber optic cable - no RF interference.
- Supports resolutions to 1080p (1920x1080).



**CMP-DVI-FOSC (Front & Back)**

- **Convert Component Video into DVI**
- **Extend up to 1,640 feet**

The Component Video to DVI Converter/Extender converts component video into a DVI signal that can be extended up to 1,640 feet (500 meters) using single-strand multimode SC fiber optic cable.

The Converter/Extender system has two components: the component video converter/transmitter, which connects to the component video source and also supplies video to a local component video display, and a ST-1FODVI-R-SC500M receiver that connects to a remote DVI monitor. The units are interconnected by a single-strand multimode SC fiber optic cable.

## Specifications

### CONVERTER (CMP-DVI-FOSC)

#### Video Input

- Three female RCA connectors for component video input.

#### Video Output

- Three female RCA connectors for component video output.
- One female SC fiber connector for optical DVI output.
- Supports resolutions to 1080p (1920x1080).

#### Power

- 100 to 240 VAC at 50 or 60 Hz via AC adapter.

#### Environmental

- Operating temperature: 32 to 122°F (0 to 50°C).
- Storage temperature: -22 to 158°F (-30 to 70°C).
- Relative humidity: 0 to 85% non-condensing RH.

#### Dimensions

- WxDxH in: 4.09x4.41x1.10 (104x112x28 mm)

#### Regulatory Approvals

- CE, FCC, RoHS

#### Warranty

- Two years

### Optical Receiver (ST-1FODVI-R-SC500M)

#### Video Input

- One female SC fiber connector for optical DVI input.

#### Video Output

- One male DVI-D single link connector for DVI output.
- Supports resolutions to 1920x1200.

#### Power

- 100 to 240 VAC at 50 or 60 Hz via AC adapter.

#### Environmental

- Operating temperature: 32 to 122°F (0 to 50°C)
- Storage temperature: -22 to 158°F (-30 to 70°C)
- Relative humidity: 0 to 85% non-condensing RH

#### Dimensions

- WxDxH in: 1.54x2.20x0.59 (39x56x15 mm)

#### Regulatory Approvals

- CE, FCC, RoHS

#### Warranty

- Two years.

#### Max Distance

- 1,640 feet (500 meters) over 50µm multimode SC fiber optic cable.


#### Cables

- Use a FIBER-S-SCSC-50-xM (simplex multimode SC 50-micron) fiber optic cable to extend the remote unit up to 1,640 ft (not included).
  - Simplex multimode SC 62.5-micron fiber optic cables are also compatible.

# Component Video to DVI Converter/Extender via Fiber Cable to 1,640 ft VIDEO CONVERTERS

Converts component video to DVI video and extends up to 1,640 feet

## Configuration and Cable Illustration

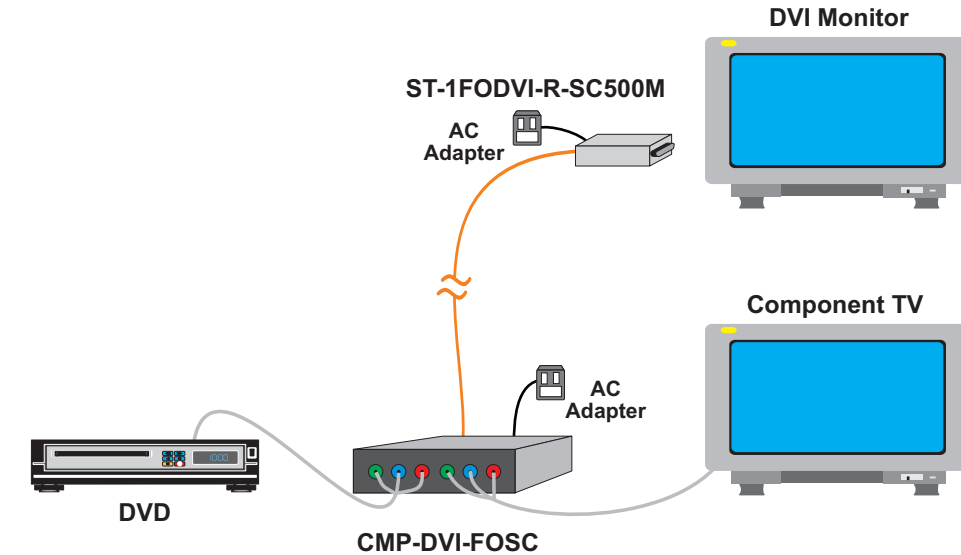

— = FIBER-S-SCSC-50-xM  
Simplex multimode SC 50-micron cable  
(up to 1,640 ft)