




Item | Split Core Current Transformer | Model | ENVIROMUX-CT250-SC24

Dimension (Unit:mm)

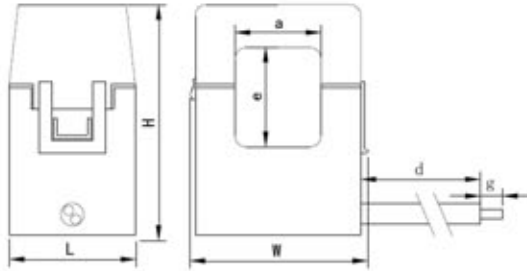

Outline Size			Window Size		Leads	
L	W	H	a	e	d	g
34	51	67	24	24	1000	6


Electrical Diagram



Parameters

Rated Current	250A
Output	333mV
Accuracy	1.0
Frequency	50/60HZ
Insulation Strength	3KV

Performance Curve

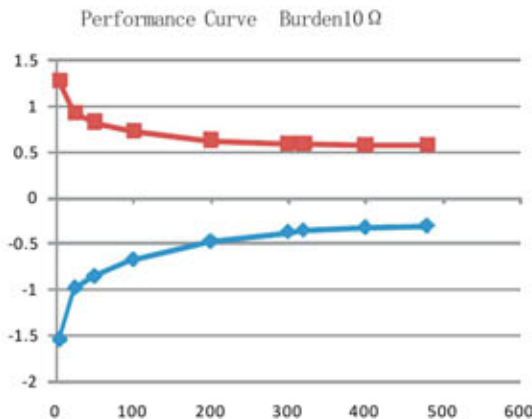

Specification

Leads: 1015# 24AWG  
 Operating Temperature: -20°C to +55°C  
 Storage Temperature: -40°C to +70°C  
 Features: Split core design, the split core design permits non-contact current measurements through magnetic field induction without requiring that the primary wire be taken offline and disconnected for CT installation. This method permits a safer, easy and portable current measurement