


NTI P/N: ENVIROMUX-STHS-PRCIND-xx
xx= 10/25/50/100 Feet

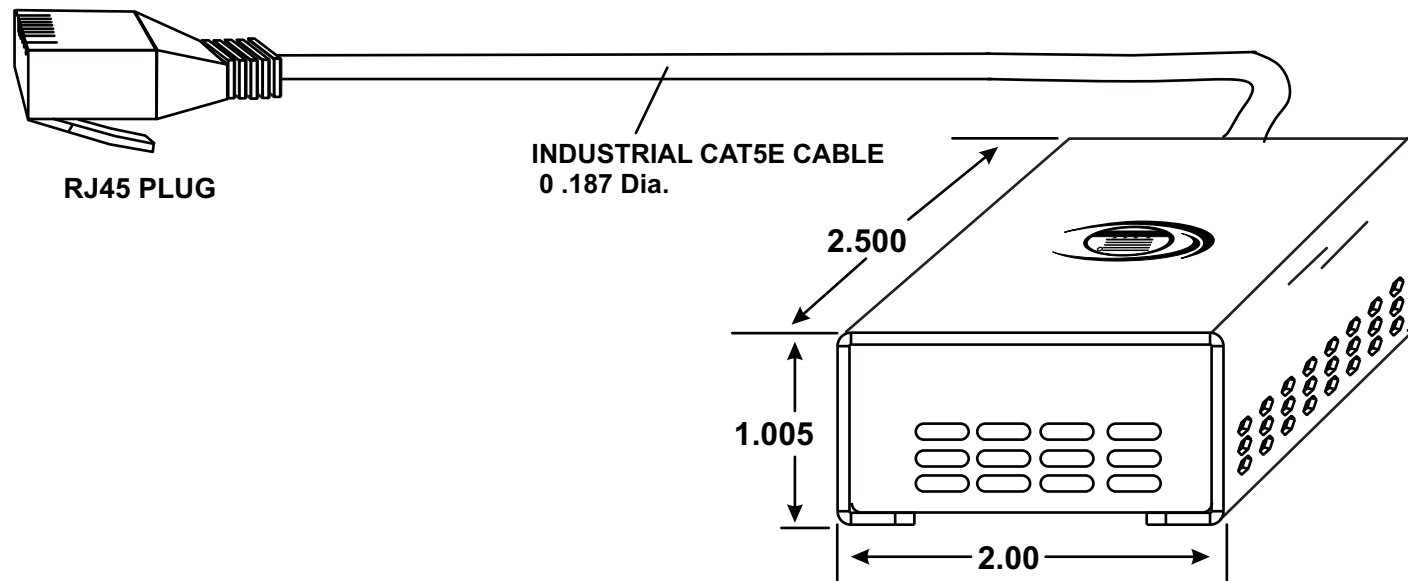

- Applications from -40 to 185°F (-40 to 85°C) and 10 to 80% relative humidity.
 - Accurate to within $\pm 0.4^\circ\text{F}$ ($\pm 0.2^\circ\text{C}$) and $\pm 1.8\%$ relative humidity.
 - High resistance to external influences on the cable due to digital output signal.
 - RJ45 connector.
 - Voltage Supply: 5VDC
 - Current Consumption: 20mA
 - Communication type: RS485
 - Data rate: 96kbps
 - Available lengths for attached CAT5e cable: 10/25/50/100 feet.
 - Call for pricing on custom lengths up to 1,000 feet.
 - Powered by ENVIROMUX-2D/5D/16D.
 - Compatible with ENVIROMUX-2D/5D/16D.
 - ENVIROMUX-2D: only compatible with Rev C units (features two power inputs).
 - Regulatory approvals: CE, RoHS
 - Compatible with [ENVIROMUX-FSC](#) Fiber Converter/Extender.
- Use to extend sensor up to 1.2 miles (2 km) from the ENVIROMUX unit.

UNITS: Inches

NTI® NETWORK TECHNOLOGIES INCORPORATED
1275 Danner Dr Aurora, OH 44202
Tel: 330-562-7070 Fax: 330-562-1999
www.networktechinc.com