



NTI P/N: E-TA-E7

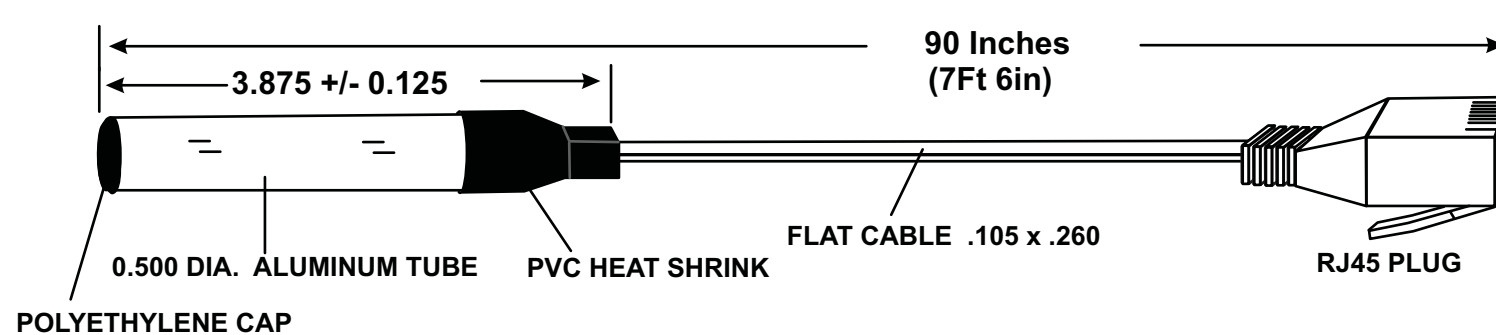

RJ45-FF
Coupler
(Supplied)



Extend sensor up to
1000 feet with CATx
cable (min. 24AWG)
using inline coupler

- For use with E-MINI-LXO and E-MICRO-T(RHP) .
Applications from -4 to 140°F (-20 to 60°C).
- High resistance to external influences on the cable due to digital output signal.
- Temperature Accuracy:
 - $\pm 2.7^{\circ}\text{F}$ ($\pm 1.50^{\circ}\text{C}$) for 77 to 140°F (25 to 60°C)
 - $\pm 3.96^{\circ}\text{F}$ ($\pm 2.2^{\circ}\text{C}$) for -4 to 77°F (-20 to 25°C) .
- Aluminum probe for added thermal conductivity (applications where surface temperature is needed).
- Includes an RJ45 coupler to extend the sensor up to 500 feet (152 m) using CATx cable (minimum 24AWG).
 - Use up to 5 couplers to extend the sensor
 - Note: Included RJ45 coupler is not IP65 rated. To extend the sensor longer than 7 feet outdoors, contact an NTI product consultant.
- Current consumption: <math><1\text{mA}</math> @ 5VDC.
- IP65 rated water and dust protection
- Powered by E-MINI-LXO or E-MICRO-T(RHP).
- Regulatory approvals: CE, RoHS.

UNITS: Inches