

PS/2 KVM SERVER SWITCH WITH RS232 CONTROL OPTION

Control multiple PCs with one keyboard, monitor and mouse



KEEMUX-P8 (Front & Back)

Features & Applications

KEEMUX® PS/2 KVM switches allow one keyboard, monitor and mouse to control multiple PCs (up to 128 computers). Dedicated internal microprocessors emulate keyboard and mouse presence to each attached PC 100% of the time so all computers boot error free.

- Control all network computers from one office.
- Auto scan all computers to catch system failures early.
- Improve manageability of your computer room — eliminate extra cables, monitors, keyboards and mice.
- Compatible with IntelliMouse®.
- Compatible with SUN Fire™ V20z.
- Compatible with all PS/2-style PCs and laptops, HP9000, Silicon Graphics and IBM RS6000 workstations.
- Broadcast keystrokes to all computers for simultaneous shut-downs.
- Cascade smaller KVM switches together as your network grows-up to 128 ports.
- Available with RS232 Control option.

Specifications

Monitor-VGA

- Bandwidth is 150MHz.
- Supports 1900x1200 resolution with no degradation.
- All connectors are female 15 pin high density VGA.

Mouse

- All connectors are female.
- Connector is 6 pin miniDIN.
- Compatible with all standard 2-button PS/2 mice as well as the following:
 - Alps Glidepoint Touchpad-extended functions (i.e. tapping, etc.) are not supported.
 - Cirque Glidepoint Touchpad.
 - IBM Scroll Point mouse-extended stick functions are not supported.
 - Kensington Orbit Trackball.
 - Logitech (and other) 3-button mice.
 - Logitech 2-button Wheel Mouse.
 - Microsoft Ballpoint mouse.
 - Microsoft IntelliMouse.

Keyboard

- All connectors are female.
- Connector is 6 pin miniDIN.
- Keyboard and mouse presence are emulated 100% of the time so all computers boot error-free.
- Keyboard and mouse are hot-pluggable.
- PC switch will hard or soft boot all PCs 100% of the time.
- SCROLL-, CAPS- & NUM- LOCK lights update upon switching.

Power

- 110 or 220 VAC at 50 or 60 Hz via AC adapter.
- Two-port switches draw power from attached computers.

Regulatory Approvals

- RoHS


Warranty

- Two years

PS/2 KVM SERVER SWITCH WITH RS232 CONTROL OPTION

Control multiple PCs with one keyboard, monitor and mouse

Configuration and Cable Illustration

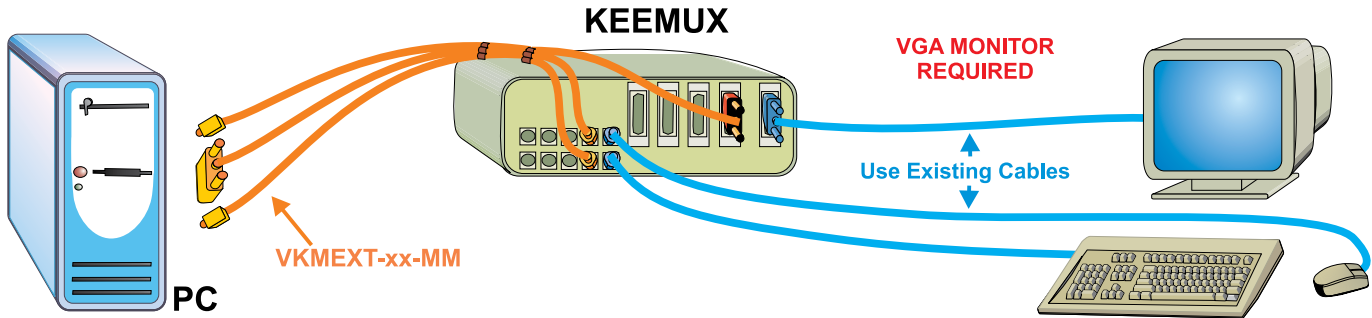

Built-in Control Methods

Front Panel Interface

- Touch a button and be connected to a CPU or change modes of operation.
- LEDs indicate currently selected port and mode of operation.
- Hold in any button for more than two seconds to go into **Scan Mode, Broadcast Mode or Command Mode**.
 - **Normal Operating Mode**, the user can directly operate the selected computer with transparent presence of the NTI switch.
 - **Scan Mode** feature causes the switch to automatically and sequentially display the video from each powered on computer for 2-255 seconds.
 - **Broadcast Mode** feature allows the user's keystrokes to be sent to all powered on computers.
 - **Command Mode** allows the user to give instructions to the switch through their keyboard. Keystrokes are not passed to the computer.

Keyboard

- Type <CONTROL> + <~> to go into **Command Mode**. (“~” is the accent mark located on the same key as the tilde “~”)
- Press **ESCAPE** to leave **Command Mode** and return to **Normal Mode**
- **Scan Mode, Broadcast Mode or Command Modes** are available from the keyboard.

PS/2 KVM Switch with RS232 Control, Rackmount

NTI Part #	# of CPUs	Rack Units	Rack Size WxDxH (in.)
KEEMUX-P2-R-RS	2	1RU	19x10x1.75
KEEMUX-P4-R-RS	4	1RU	19x12x1.75
KEEMUX-P8-R-RS	8	1RU	19x12x1.75
KEEMUX-P16-RS	16	2RU	19x10x3.5

PS/2 KVM Switch, Desktop

NTI Part #	# of CPUs	Desktop Size WxDxH(in.)
KEEMUX-P2	2	8x6.2x2.6
KEEMUX-P4	4	10x7.5x3.3
KEEMUX-P8	8	10x7.5x3.3

PS/2 KVM Switch, Rackmount

NTI Part #	# of CPUs	Rack Units	Rack Size WxDxH (in.)
KEEMUX-P2-R	2	1RU	19x10x1.75
KEEMUX-P4-R	4	1RU	19x12x1.75
KEEMUX-P8-R	8	1RU	19x12x1.75
KEEMUX-P16	16	2RU	19x10x3.5
KEEMUX-P32	32	4RU	19x10x7

PS/2 KVM Switch with RS232 Control, Desktop

NTI Part #	# of CPUs	Desktop Size WxDxH(in.)
KEEMUX-P2-RS	2	8x6.2x2.6
KEEMUX-P4-RS	4	10x7.5x3.3
KEEMUX-P8-RS	8	10x7.5x3.3



330.562.1999
Worldwide fax



sales@ntigo.com



www.networktechinc.com

©2007, 2009 NTI
All rights reserved