


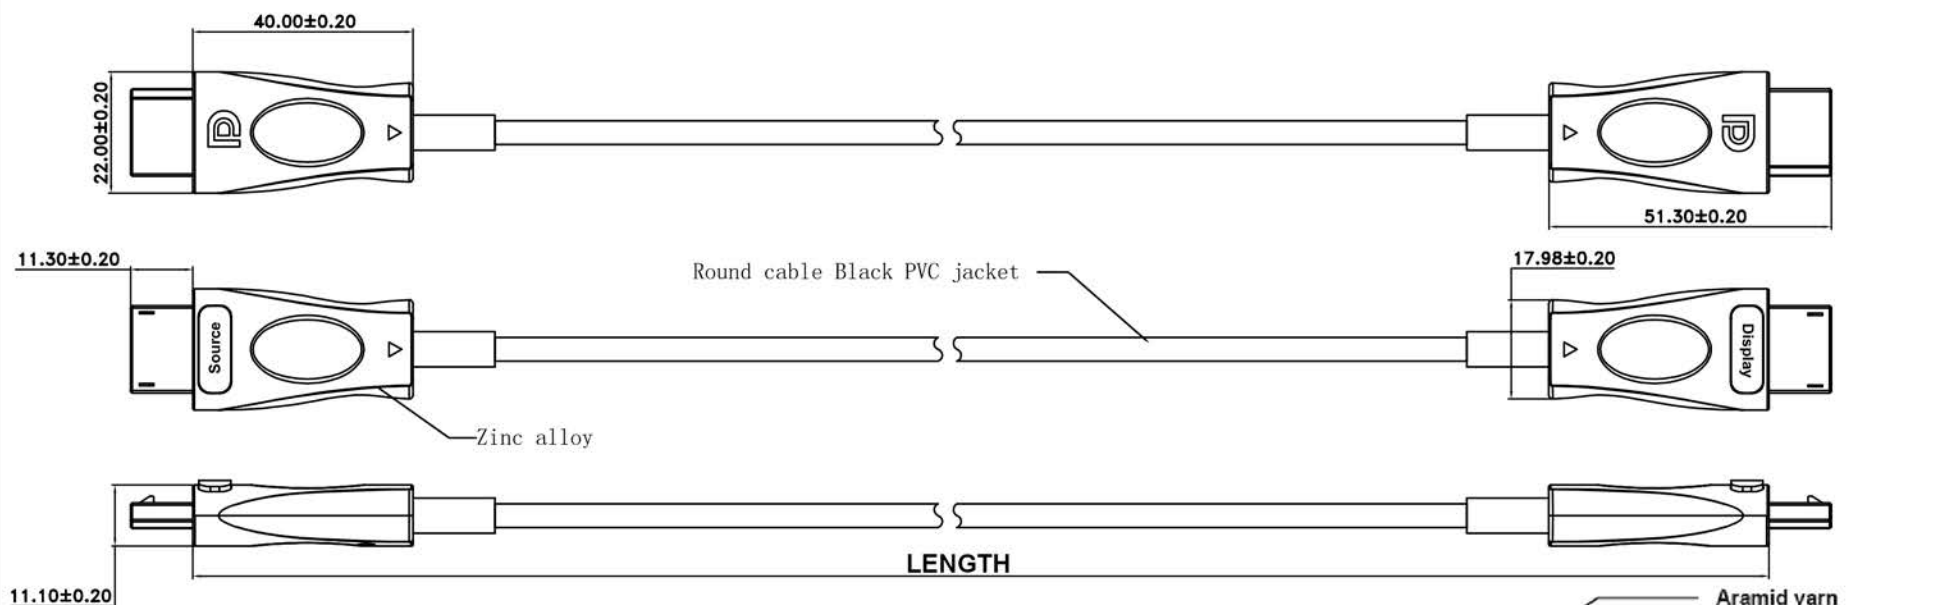

NOTE:

- Supports computer resolutions to 8K@60Hz 4K@120Hz 4:4:4
- Plug and Play
- Compatible with DP 1.4 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant

Length-Meters	Tolerance: +/- M
10	0.4
15	0.6
20	0.8
25	1
30	1.2
50	2
70	2.8
100	4

UNITS: Millimeters