


# E-ACKR

## DIGITAL ACCESS CONTROL CARD READER KEYPADS



- Durable Epoxy Coated Silicone Rubber Back-lit Key Board with Door Bell Button
- Stainless Steel Faceplate on Surface Mount Plastic Housing
- Surface Mount on Wall or Flush Mount on Gang Box
- Relay Output Contacts for Door Strike and Door Bell
- Operated with PINs & EM Cards
- Ideal for Door Strike & Alarm Control Applications
- 26-bit & 34-bit Wiegand Data Output Reader Keypad
- Dual Output Relay for Output 1 & Output 2

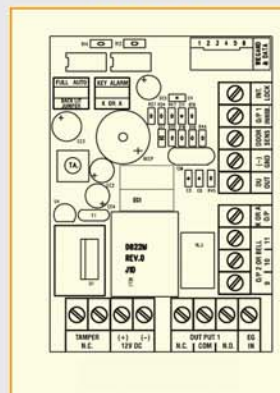

The E-ACKR is a compact full-feature self-contained dual relay output keypad. It combines the functions of digital keypad and proximity EM card reader in one unit. The buttons of the keypad are epoxy coated silicone rubber that is prepared for high traffic access control applications.

The E-ACKR has been designed to work independently as a stand-alone keypad. It is also a card reader providing 26 bits of Wiegand data output from reading of an EM Card and 34 bits data output from the entry of a pin/ User Code. The Wiegand data can be used by consultants and end users when setting product design or system installation criteria.

The E-ACKR has two output relays ("Output 1" and "Output 2") with both N.C. and N.O. output contacts.

### MAIN FEATURES

- Stand Alone Electric Lock or Inter-Lock Installation
- Users for Output 1 – 1,000 (PINs and/or Cards) + 50 Duress Codes
- Users for Output 2 – 100 (PINs and/or Cards) +10 Duress Codes
- 50 Visitor Codes for Output 1, Programmable for One Time; or Valid for 1 to 99 Hours
- Over 100 Million Combinations for User PINs
- Super User Code Operates The Output 1, & 2, Also Makes Operation Inhibit or Resets Inhibit for Output 1
- Wiegand Data Output for The Valid Entry of PINs (34 bits) & Reading of EM Cards (26 bits)
- Sole Reader Mode Provides Wiegand Data Output for All PIN Entries & Card Readings
- Card Reader Compatible with All The Standard 125Khz Proximity EM Cards & Keyfobs
- Programmable Intelligent Egress Button Controls "Going Out" with Delay, Warning and Button Contacting Manners of Momentary or Holding Contact
- Common User PIN, Group User PINs & Private User PINs for Working with The EM Card at Various Levels of Security Enhancement
- ON-OFF Selectable for Pacifier Tone, Standby Flashing LED & Keyboard Back-lit Lighting
- Input Terminals for Door Position Sensor, Egress Button & Output 1 Inhibit Control
- Open Collector Outputs for The Duress, Alarm, Key Active, Inter-lock & Output 2, 100mA Sink / 24VDC Maximum Rating
- Output Relay 1 – N.C. & N.O. Dry Contacts, 5A / 24VDC Maximum
- Output Relay 2 – N.C. & N.O. Dry Contacts, 1A / 24VDC Maximum
- Extremely Long Programmable Timer for Output Relays; 1 Second to Over 24 Hours
- Tamper Switch – N.C. Dry Contact; 50mA/24VDC
- Operating Voltage Range : 12VDC Nominal; 11-15VDC
- Operating Current : 50 (Quiescent) to 150mA (3 Relay Active)
- Operation Temperature :-4 Deg F to +158 Deg F (-20 Deg C to +70 Deg C)
- Environment Humidity : 5-95% Relative Humidity, Non-condensing
- Operation Environment & Ingress Protection : IP-50
- Flush Mount on Gang Box Or on The Supplied Surface Mount Box
- Dual Level Back-lit Keyboard
- Weight : 0.49 lb (220g)
- Dimensions (WxDxH) : 2.83 x 1.70 x 4.61 in

Specifications are subject to change for modifications without notice



**NETWORK  
TECHNOLOGIES  
INCORPORATED**

1275 Danner Dr Tel:330-562-7070  
Aurora, OH 44202 Fax:330-562-1999  
www.networktechinc.com