


# NTI P/N: ENVIROMUX-RTDS-A392

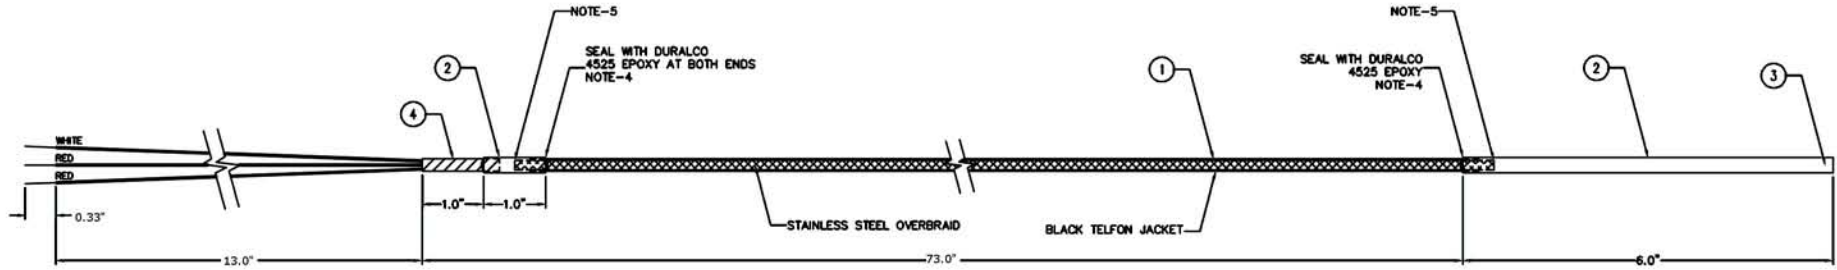

| ITEM | QTY | PART NO. | DESCRIPTION                            |
|------|-----|----------|--|
| 1    | 1   |          | WIRE, NC, 3 COND, 22#F, TE/SS BRAID/TE |
| 2    | 1   |          | TUBING, 0.25" DIA X 0.020" WT          |
| 3    | 1   |          | ELEMENT 100 Pt A CLASS 385,2.3x2mm TF  |
| 4    | 1   |          | HEAT SHRINK, 1.25" LONG                |

#### NOTES:

1. PLATINUM RTD, 3-WIRE, 100 OHM TO DIN 43760
2. RATED -50°C TO +200°C.
3. WATERPROOF CONSTRUCTION.
4. LEVEL OFF EPOXY SEALS AT ENDS OF TUBING.
5. LEAVE EXCESS UNCOVERED BRAID FOR BONDING WITH EPOXY & TUBING.

**NTI**® NETWORK  
TECHNOLOGIES  
INCORPORATED

1275 Danner Dr Tel:330-562-7070  
Aurora, OH 44202 Fax:330-562-1999  
www.networktechinc.com