


NTI P/N: E-STHS-PRCIND-xx

xx= 10/25/50/100 Feet

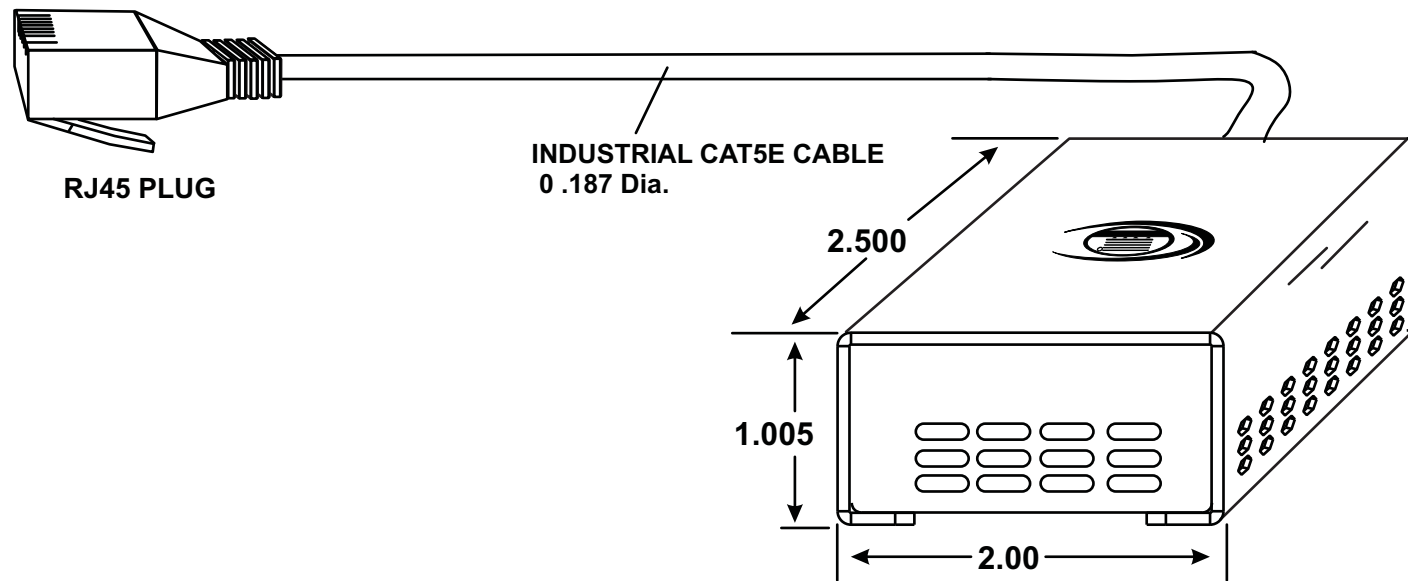

- Applications from -40 to 185°F (-40 to 85°C) and 10 to 80% relative humidity.
- Accurate to within $\pm 0.4^\circ\text{F}$ ($\pm 0.2^\circ\text{C}$) and $\pm 1.8\%$ relative humidity.
- High resistance to external influences on the cable due to digital output signal.
- RJ45 connector.
- Voltage Supply: 5VDC
- Current Consumption: 20mA
- Communication type: RS485
- Data rate: 96kbps
- Available lengths for attached CAT5e cable: 10/25/50/100 feet.
- Call for pricing on custom lengths up to 1,000 feet.
- Powered by E-2D/5D/16D.
- Compatible with E-2D/5D/16D.
- E-2D: only compatible with Rev C units (features two power inputs).
- Regulatory approvals: CE, RoHS
- Compatible with [E-FSC](#) Fiber Converter/Extender.
- Use to extend sensor up to 1.2 miles (2 km) from the ENVIROMUX unit.

UNITS: Inches

NTI® NETWORK TECHNOLOGIES INCORPORATED
1275 Danner Dr Aurora, OH 44202 Tel:330-562-7070 Fax:330-562-1999
www.networktechinc.com