

Rackmount DVI USB + PS/2 KVM Drawer, up to 1920x1200 Resolution

RACKMUX®

DVI USB + PS/2 KVM Drawer provides space-saving convenient control.


- Available with 17" Active Matrix LCD DVI flat panel monitor.
 - Optional hi-res 1920x1200 17.1" monitor available
 - Tilt LCD up and back to adjust to any comfortable viewing angle to 120°.
- Compatible with DVI-enabled USB and PS/2 computers.
- Torque-friction hinges-monitor does not wobble, spring, or slam shut.
- Compact, heavy-duty tactile keyboard.
 - Available with 17-key numeric keypad or large padded wrist-rest.
- Drawer locks into place when open to prevent it from sliding in and out of the rack.
- Available with optional mounting bracket for two-post style telco rack.
- Rugged steel construction with durable powder coat finish.
- LCD auto-shutoff in closed position.
- Internal cable arm provides proper cable management for sliding the drawer open and closed.
- Equipped with On Screen Display (OSD).
- Designed to be a one-person job when installing the drawer.
- Front panel security lock.
- Front panel USB port to connect an external USB device, such as a flash drive.
- Available with optional 24VDC power.



RACKMUX-D17-N

- **Single-Person Installation**
- **Optional Hi-Res 1920x1200 17.1" LCD**

The RACKMUX® DVI USB + PS/2 KVM Drawer combines a rackmount LCD monitor, keyboard, and touchpad mouse in a space-saving 1RU industrial strength drawer.

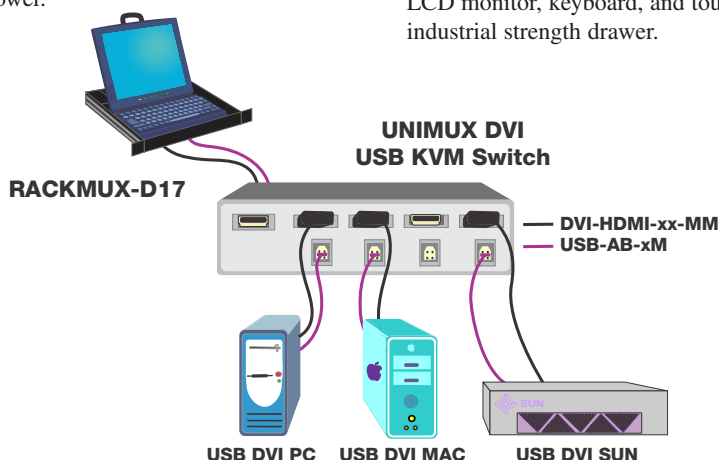

Specifications

Host Interface

- Compatible with PS/2, UNIX and USB-enabled computers.
- Multiplatform support: Windows 2000/XP/Vista/7/8/10, Windows Server 2000/2003/2008/2012, Solaris, Linux, FreeBSD, and MAC OS 9/10.
- One female DVI-D, one female USB Type B, and two female 6-pin minDIN connectors.
- Use with NTI Multi-Platform KVM Switches to control multiple PC, SUN and MAC computers.
 - KVM drawer must be connected to a USB-enabled computer.

Environmental

- Operating temperature: 32°F to 104°F (0°C to 40°C).
- Storage temperature: -4°F to 140°F (-20°C to 60°C).
- Operating and Storage Relative Humidity: 20 to 90% non-condensing RH.

Cables

- 6.5 foot DVI-D male to male single link cable.
- 6-foot USB Type A male to USB Type B male cable included.
- 6-foot dual 6-pin miniDIN male to male keyboard/mouse cable included.
- 6-foot power supply cable included.

Power

- RACKMUX-D17(-N), RACKMUX-D17HR-N(-24V)
 - 110 or 220 VAC at 50 or 60 Hz via IEC connector.
 - Power Consumption: 30 W
 - Maximum Inrush Current: 30A
- RACKMUX-D17HR-N-24V
 - 3-pin terminal block for 24V power source.
 - Accepts 18~36VDC (24VDC nominal).
 - For installation in a 24V Telecom environment.

Rackmount DVI USB + PS/2 KVM Drawer, up to 1920x1200 Resolution

RACKMUX®

DVI USB + PS/2 KVM Drawer provides space-saving convenient control.

Specifications (continued)

- Monitor**
- Forward-folding 17" Active Matrix LCD DVI flat panel monitor.
 - Resolution
 - RACKMUX-D17(-N): 1280x1024
 - RACKMUX-D17HR-N: 1920x1200
 - Tilt: up to 120°.
 - Frequency:
 - RACKMUX-D17(-N):
 - ◆ Horizontal: 31 to 80 KHz
 - ◆ Vertical: 55 to 76 Hz.
 - RACKMUX-D17HR-N:
 - ◆ Horizontal: 30 to 80 KHz
 - ◆ Vertical: 56 to 75 Hz.
 - OSD controls for brightness, contrast, phase, pitch, Horz- and Vert-center alignment, zoom and color adjustment.
 - Brightness:
 - RACKMUX-D17(-N): 300 nits
 - RACKMUX-D17HR-N: 275 nits
 - Contrast Ratio:
 - RACKMUX-D17(-N): 500: 1
 - RACKMUX-D17HR-N: 800: 1
 - Supports DDC1 and DDC2B protocols.
- Devices**
- Keyboard available in: English (US).
 - RACKMUX-D17: 83-key (US) keyboard with wrist-pad.
 - RACKMUX-D17-N, RACKMUX-D17HR-N(-24V): 100-key (US) keyboard with numeric keypad.
 - Three button touchpad mouse.
 - Front panel USB 1.1 port to connect external USB devices.
 - Female USB Type A connector.
 - KVM drawer must be connected to a USB-enabled computer.
- Power**
- RACKMUX-D17(-N), RACKMUX-D17HR-N(-24V)
 - 110 or 220 VAC at 50 or 60 Hz via IEC connector.
 - Power Consumption: 30 W
 - Maximum Inrush Current: 30A
 - RACKMUX-D17HR-N-24V
 - 3-pin terminal block for 24V power source.
 - Accepts 18~36VDC (24VDC nominal).
 - For installation in a 24V Telecom environment.
- Dimensions**
- WxDxH (Inches): 19x23.9x1.75 (483x607.06x45 mm)
 - Handle adds an additional 1.5 in (45 mm) to the depth when monitor is in closed position.
 - Weight: 30.2 lbs (13.7 kg)
 - Drawer is adjustable to various rack depths from 24 in (609.6 mm) deep to 40 in (1016 mm) deep.
 - Drawer locks into place when open to prevent it from sliding in and out of the rack.
 - Rack ears are available for two post style telco rack mounting, select part number RL-T15-TEL.
- Regulatory Approvals**
- CE, RoHS
- Warranty**
- Two years
- Package Includes**
- KVM Drawer
 - 2 keys for lock
 - IEC Power Cord, country-specific (excluded in 24V model)
 - 6-ft USB Type A male to USB Type B male cable
 - 6-ft PS/2 male to male mouse and keyboard cable
 - 2-meter DVI-D male to male video cable
 - CD with manual and drawer installation manual
 - Single-person installation mounting kit

USB + PS/2 KVM Drawers with DVI Monitor			
NTI Part #	Features	Screen Size	Video Resolution
RACKMUX-D17	DVI, LCD, USB & PS/2 Keyboard Mouse	17"	1280x1024
RACKMUX-D17-N	DVI LCD, USB & PS/2 Keyboard Mouse, Numeric Pad	17"	1280X1024
RACKMUX-D17HR-N	DVI LCD, USB & PS/2 Keyboard Mouse, Numeric Pad	17.1"	1920X1200
RACKMUX-D17HR-N-24V	DVI LCD, USB & PS/2 Keyboard Mouse, Numeric Pad, 24V Power	17.1"	1920x1200