# Rackmount KVM Drawer with HDMI Multiviewer & USB KVM Switch RACKMUX®

Display video from four HDMI/DVI computers simultaneously on a 1RU DVI LCD KVM drawer. Switch to and control any of the four computers while monitoring the other three connections in real time.




### RACKMUX-D17HR-N-SUSBHD4 (Front & Back)

- Hi-Res 1920x1200 17.1" LCD
- Built-in Multiviewer & USB KVM Switch
- Quad, Picture in Picture, Full Screen, and Custom Display Modes
- Single-Person Installation

The RACKMUX® KVM Drawer with Built-in quad screen multiviewer & USB KVM Switch combines a rackmount LCD monitor, keyboard, touchpad mouse and a Quad Screen Multiviewer with USB KVM switch in a space-saving 1RU industrial strength drawer.

- Available with forward-folding 17.1" Active Matrix LCD DVI flat panel monitor.
- Video Resolution: 1920x1200.
- Integrated HDMI multiviewer and USB KVM switch.
  - Simultaneously display video from four different computers on the KVM drawer's LCD display.
  - Quad, Picture in Picture, Full Screen, and Custom display modes.
- Control up to 4 USB enabled computers with HDMI/DVI outputs.
- Any DVI source or display can be connected by using DVI-HD-xx-MM cable (not included).
  - Use DVI-HD-CNVTR DVI + Audio to HDMI Converter to pass and independently switch audio signals to the drawer.
- Torque-friction hinges monitor does not wobble, spring, or slam shut.
- Compact, heavy-duty tactile keyboard with 17-key numeric keypad.
- Three-button touchpad mouse supports single-finger gestures.
- Rugged steel construction with durable powder coat finish.
- LCD auto-shutoff in closed position.
- Drawer locks into place when open to prevent it from sliding in and out of the rack.
- Cable management tray included.

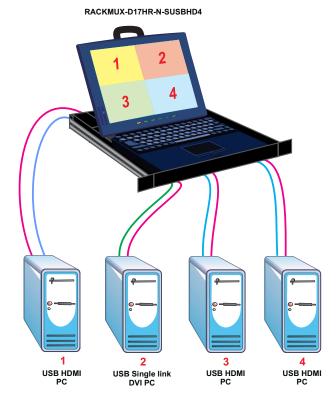

= HD-xx-MN

- = DVI-HD-xx-MM

= Male USB Type A to Male USB Type B

330.562.1999 Worldwide fax sales@ntigo.com www.networktechinc.com

## Rackmount KVM Drawer with HDMI Multiviewer & USB KVM Switch RACKMUX®

Display video from four HDMI/DVI computers simultaneously on a 1RU DVI LCD KVM drawer. Switch to and control any of the four computers while monitoring the other three connections in real time.

## **Specifications**

### **Power**

■ 100 to 240 VAC at 50 or 60 Hz via IEC connector

### **Dimensions**

- WxDxH: 19x27.5x1.75 inches. (483x699x44 millimeters)
  - Handle adds an additional 1.5" to the depth when monitor is in closed position.
  - Cable management tray adds an additional 3" to the depth.
- Drawer is adjustable to various rack depths from 24" (610 mm) deep to 40" (1,016 mm) deep.
- Drawer locks into place when open to prevent it from sliding in and out of the rack.
- Rack ears are available for two post style telco rack mounting, select part number RL-T15-TEL.

### **Regulatory Approvals**

- CE, RoHS
- TAA compliant

### **Environmental**

- Operating temperature: 32 to 104°F (0 to 40°C).
- Storage temperature: -4 to 140°F (-20 to 60°C).
- Operating and storage relative humidity: 20 to 90% non-condensing RH.

### Warranty

Two years

### **Package Includes**

- KVM Drawer
- IEC Power Cord, country-specific
- DB9 female to RJ45 female adapter
- 5-ft CAT5 patch cable
- Single-person installation mounting kit

