# VGA to DVI Converter VIDEO CONVERTERS

## Converts analog VGA signal to single link digital DVI-D video

- Connects computers with analog VGA connectors to single link DVI-D monitors or projectors.
- Supports HDTV resolutions to 1080p and computer resolutions to 1920x1200.
- Front panel switches:
  - VGA input: RGB or YPbPr.
  - VGA output: Bypass or RGB.
- Supports VGA/SVGA and DVI-D monitors, including LCD flat panel monitors.
- Adjustable EDID via preset buttons.
- Supported resolutions: 1920x1200, 1080p, 1600x1200, 1280x1024.



### VGA-DVI (Front & Back)

The VGA to DVI Converter changes your computer's analog VGA signal to single link digital DVI video instantly. The converter generates the compatible analog to digital conversion signals to make the connection between the VGA input and the DVI-D output work.

## **Specifications**

#### Connectors

- One female 15-pin HD input connector.
- One female 15-pin HD output connector.
- One female DVI-I single link output connector.

#### Video

Supports HDTV resolutions to 1080p and computer resolutions to 1920x1200.

#### Cables

■ Includes 3-foot (0.91-meter) VGA male to male cable.

#### Dimensions

■ WxDxH (in): 6.4x4.1x1.1 (163x104x28 mm).

#### **Configuration and Cable Illustration**

### Power


- 110 or 220 VAC at 50 or 60 Hz via AC adapter.
- Power consumption: 3.5W.

#### Environmental

- Operating temperature: 32 to 122°F (0 to 50°C).
- Storage temperature: -4 to 158°F (-20 to 70°C)
- Operating and Storage Relative Humidity: 30 to 80% non-condensing RH.

#### **Regulatory Approvals**

CE, FCC, RoHS

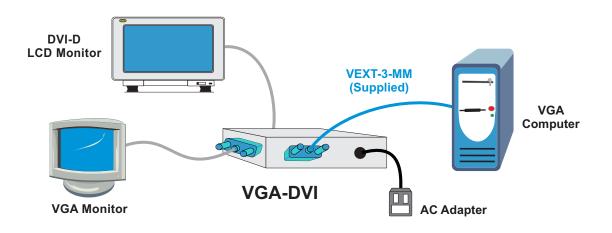



 1.800.RGB.TECH (800.742.8324)
 330.562.7070
 330.562.1999

 ToIl Free: US & Canada
 International calls
 Worldwide fax

 © 2007, 2015 NTI. All rights reserved.

sales@ntigo.com www.networktechinc.com