

Creation of Custom x509 Certificates for ENVIROMUX Series Products

The ENVIROMUX family of products is designed to be configurable with security to limit access to their web interface controls. The ENVIROMUX includes a default x.509 certificate. However, this procedure will help you create your own custom x.509 certificate to use with this feature. This procedure was created using CentOS and OpenSSL.

Note: Do not disable access to the ENVIROMUX web interface using http before you verify that the https client authentication works properly (see last page).

I. Using Self-Signed Certificates for ENVIROMUX Series Products

We can use self-signed certificates to access ENVIROMUX products with HTTPS with a self-signed root certificate authority. In this procedure, our root certificate authority needs to be explicitly added to every PC as trusted authority, to access the product page.

1. Creating a Self-Signed Certificate Authority using OpenSSL

An example SSL configuration file to use can be found here: <http://www.networktechinc.com/download/openssl.cnf>

When using this document, make a copy of the current default openssl configuration file and replace it with the file above.

a. Creating the Certificate Management Files and Directories

The following directories are made for organizing the files being used and generated. These directories are also used for other procedures in the document.

1. Create directory "ntiCA" in /usr/local/ssl for ntiCA certificate management and change to that directory. If you prefer, this directory name can be set to any other name like MyCompanyCA. Make sure the `openssl.cnf` file is edited to match the changes to the folder name. The `openssl.cnf` file can usually be found in /usr/local/openssl/openssl.cnf on local installations of OpenSSL.

```
# mkdir /usr/local/ssl/ntiCA
# cd /usr/local/ssl/ntiCA
```

Create the following directories in the ntiCA directory: **(The number sign (#) is the command prompt, not part of the command.)**

```
# mkdir CA
# mkdir server
# mkdir server/certificates
# mkdir server/requests
# mkdir server/keys
# mkdir user
# mkdir user/certificates
# mkdir user/requests
# mkdir user/keys
```

Perform the following commands in the ntiCA directory:

```
# cd /usr/local/ssl/ntiCA
# touch index.txt
# echo "01" > serial
```

b. Creating the CA Key and Certificate

The general process for creating a certificate includes:

1. Creating a private CA key
2. Creating a certificate request
3. Creating and signing a certificate from the certificate request

1. Create the private CA key:

```
# cd /usr/local/ssl/ntiCA
# openssl genrsa -out ./CA/ntiCA.key 2048
Generating RSA private key, 2048 bit long modulus
.....+++++
.....+++++
e is 65537 (0x10001)
```

2. Create the CA certificate signing request:

```
# openssl req -sha512 -new -key ./CA/ntiCA.key -out ./CA/ntiCA.csr
```

You are about to be asked to enter information that will be incorporated into your certificate request.

What you are about to enter is what is called a Distinguished Name or a DN.

There are quite a few fields but you can leave some blank

For some fields there will be a default value, (indicated by the characters "[]")

If you enter '.', the field will be left blank.

```
Country Name (2 letter code) [US]:US
State or Province Name (full name) [OH]:OH
Locality Name (eg, city) []:
Organization Name (eg, company) [NTI]:NTI
Organizational Unit Name (eg, section) []:
Common Name (eg, YOUR name) [NTI CA]:NTI CA
Email Address [sales@ntigo.com]:sales@ntigo.com
```

Please enter the following 'extra' attributes
to be sent with your certificate request

```
. []:
. []:
```

3. Self-sign the CA certificate:

```
# openssl x509 -req -sha512 -days 3650 -in ./CA/ntiCA.csr -out ./CA/ntiCA.crt
-signkey ./CA/ntiCA.key
Signature ok
subject=C = US, ST = OH, O = NTI, CN = NTI CA, emailAddress = sales@ntigo.com
Getting Private key
```

c. Verifying the CA certificate contents

At this point we have our self-signed CA certificate and our CA key, which will be used to sign the ENVIROMUX certificates that we create. To verify the certificate contents, use the following command:

```
# openssl x509 -in ./CA/ntiCA.crt -text
```

The output should look similar to this:

Certificate:

Data:

Version: 1 (0x0)

Serial Number:

b2:ce:14:9d:bf:52:f5:1f

Signature Algorithm: sha512WithRSAEncryption

Issuer: C = US, ST = OH, O = NTI, CN = NTI CA, emailAddress = sales@ntigo.com

Validity

Not Before: Dec 4 20:00:24 2018 GMT

Not After : Dec 1 20:00:24 2028 GMT

Subject: C = US, ST = OH, O = NTI, CN = NTI CA, emailAddress = sales@ntigo.com

Subject Public Key Info:

Public Key Algorithm: rsaEncryption

Public-Key: (2048 bit)

Modulus:

```
00:b0:43:2b:de:93:7b:ac:1f:24:96:9d:e9:98:26:
44:bc:cb:7e:04:ec:c2:64:da:60:59:a1:c8:b7:42:
52:04:b7:b2:91:b1:10:db:ea:04:25:52:14:8b:52:
a4:7f:5a:fc:08:65:c6:77:44:8b:48:27:71:68:00:
c2:09:a2:b4:4a:3d:f9:3c:f8:d0:69:24:e8:44:b8:
07:57:e1:57:2d:0e:9b:2f:3e:df:4c:71:00:45:bb:
ff:2d:a6:7f:11:2d:34:ca:f2:07:f5:79:f0:4f:9b:
d8:d3:ad:04:3b:3c:56:07:25:c1:be:fe:09:03:8a:
6e:4d:72:82:ad:67:22:2c:54:1b:d5:69:5b:2b:67:
1f:12:f5:98:ef:a4:10:1d:56:83:13:ca:8d:d7:2f:
c5:0a:da:d5:3b:30:25:9a:2c:6f:8c:94:c1:69:35:
e2:38:9b:1b:37:53:ff:d6:2d:3e:d9:1c:7a:03:b3:
71:a6:76:16:f4:eb:35:2a:f2:86:6f:40:d9:cc:6e:
59:31:ef:94:11:cf:cc:52:9d:eb:8e:06:69:67:ee:
86:98:b0:54:11:61:71:aa:ae:19:2a:f3:77:ce:95:
2c:a5:87:0d:10:16:b9:5e:88:c8:03:da:d9:6d:90:
3b:ca:4c:32:15:0c:ba:05:64:79:c7:4b:b0:7a:f5:
26:5d
```

Exponent: 65537 (0x10001)

Signature Algorithm: sha512WithRSAEncryption

```
9f:d2:50:61:36:f3:d9:b9:cb:39:5e:31:d6:2a:a8:e4:03:f0:
e0:65:4d:37:e0:60:cd:71:f5:5a:6d:7d:87:53:6e:2e:8b:3a:
f2:fb:73:fc:21:51:63:79:8a:2d:5d:a9:c2:a9:47:a1:b3:17:
9a:2e:5b:8a:7f:29:ab:08:cb:2f:52:70:26:2c:76:2d:2d:07:
81:cc:84:6f:59:db:f3:be:fe:77:dc:67:6b:5d:ff:b3:17:24:
bd:f3:c0:cc:83:10:d0:17:67:2d:e5:5b:4b:59:aa:80:fb:ec:
53:ed:e4:c5:0d:a1:0d:13:b3:0b:ee:a4:c2:f0:d2:a0:29:ef:
11:f5:6a:29:8b:46:ed:1a:64:2b:93:02:af:0d:7f:83:28:2c:
a2:11:2e:e6:fc:af:61:d2:df:eb:e2:c0:e2:46:6e:ef:51:6e:
e1:db:4f:d4:24:2b:6d:63:21:d0:3c:f2:02:6e:d0:63:10:bf:
1c:9c:bf:31:c8:74:cd:88:51:7b:cc:a6:8d:6d:c1:fb:5c:63:
```

```
8a:dc:74:de:5f:04:d2:2d:b0:5b:c7:65:06:37:c0:42:8d:87:
22:2e:2d:59:dc:89:6c:e4:32:fe:2f:88:da:42:50:6e:67:3e:
6c:7c:86:9b:f4:20:60:6b:26:c2:cd:0b:97:d8:e1:f5:f9:c1:
4c:32:6c:ab
```

-----BEGIN CERTIFICATE-----

```
MIIDLjCCAhYCCQCyzhSdv1L1HzANBgkqhkiG9w0BAQ0FADBZMQswCQYDVQQGEwJV
UzELMAkGA1UECBMCT0gxDDAKBgNVBAoTAA05USTEPMA0GA1UEAxMGTlRJIENBMR4w
HAYJKoZIhvcNAQkBFg9zYWxlcl0BudGlnby5jb20wHhcNMTg0MjA0MjAwMDI0WWhcN
Mjg0MjA0MjAwMDI0WjBZMQswCQYDVQQGEwJVUzELMAkGA1UECBMCT0gxDDAKBgNV
BAoTAA05USTEPMA0GA1UEAxMGTlRJIENBMR4wHAYJKoZIhvcNAQkBFg9zYWxlcl0Bu
dGlnby5jb20wggeiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQCwQyvek3us
HySwnemYJkS8y34E7MJk2mBZoci3QlIEt7KRsrDb6gQlUhsLUqR/WvwIZcZ3RItI
J3FoAMIJorRKPfk8+NBpJOhEuAdX4VctDpsvPt9McQBFu/8tpn8RLTTK8gf1efBP
m9jTrQQ7PFYHJcG+/gkDim5NcoKtZyIsVBvVaVsrZx8S9ZjvpBadVoMTyo3XL8UK
2tU7MCWaLg+MlMfPneI4mxs3U//WLT7ZHHoDs3Gmdhb06zUq8oZvQNmMblkx75QR
z8xSneuOBmln7oaYsFQRYXGqrhkq83f0lSylhw0QFrleiMgD2tltkDvKTDIVDLof
ZHnHS7B69SzdAgMBAEwDQYJKoZIhvcNAQENBQADggEBAJ/SUGE289m5yZleMdYq
qQD80BlTtfYm1x9VptfYdTbi6LOvL7c/whUWN5iildqcKpr6GzF5ouW4p/KasI
yy9ScCYsdi0tB4HMhG9Z2/O+/nfcZ2td/7MXJL3zwMyDENAXzy3lW0tZqod77FPt
5MUNoQ0TswvupMLw0qAp7xHlaimLRu0aZCuTAq8Nf4MoLKIRLub8r2HS3+viwoJG
bu9RbuHbt9QkK21jIdA88gJu0GMQvxycvzHIdM2IUXvMpoltwftcY4rcdN5fBNIt
sFvHZQY3wEKNhyIuLVnciWzkMv4viNpCUG5nPx8hpv0IGBrJsLNC5fy4fX5wUwy
bKs=
```

-----END CERTIFICATE-----

2. Creating a CA-Signed ENVIROMUX server Certificate (This will need to be done for each ENVIROMUX device.)

The procedure for creating a CA-Signed web server certificate is similar to that for creating the CA certificate except that the device certificate will be signed using the CA key rather than self-signing with a server-specific key.

- a. Create the web server private key using a fully qualified DNS name (or IP address).

```
# cd /usr/local/ssl/ntiCA
# openssl genrsa -out ./server/keys/your_device_fqdn_or_ipaddress.key 2048
Generating RSA private key, 2048 bit long modulus
.....++++++
.++++++
e is 65537 (0x10001)
```

- b. Create the web server certificate signing request using the same fully qualified DNS name (or IP address) you used for the private key. **It is vitally important** that you set the Common Name value to the fully qualified DNS name of your web server because that's the value that a browser client will verify when it receives the web server's certificate.

```
# openssl req -sha512 -new -key ./server/keys/your_device_fqdn_or_ipaddress.key -
out ./server/requests/your_device_fqdn_or_ipaddress.csr
```

You are about to be asked to enter information that will be incorporated into your certificate request.

What you are about to enter is what is called a Distinguished Name or a DN.

There are quite a few fields but you can leave some blank

For some fields there will be a default value, (indicated by the characters "[]")

If you enter '.', the field will be left blank.

```
Country Name [US]:US
State or Province Name [OH]:OH
```

```
Locality Name []:Aurora
Organization Name [NTI]:NTI
Organizational Unit Name []:
Common Name [NTI CA]:192.168.3.144
Email Address [sales@ntigo.com]:your_name@example.com
```

Please enter the following 'extra' attributes to be sent with your certificate request

```
. []:
. []:
```

c. Create a file defining the Subject Alternative Name. This extension file extensions.ext can be made with any text editor, and should be added to the /usr/local/ssl/ntiCA directory. This needs to be defined to know for what domains or IP addresses the certificate will be valid. Add the following lines to the extensions.ext file:

```
basicConstraints=CA:FALSE
subjectAltName=IP:<ip_address>
```

Replace “<ip_address>” with the IP address you plan to use to access the device. Other options are available for specifying this. Below is an example using a DNS:

```
subjectAltName = DNS:server.example.com
```

d. Sign the web server certificate with the CA key:

```
# openssl x509 -req -in server/requests/your_device_fqdn_or_ipaddress.csr -CA
CA/ntiCA.crt -CAkey CA/ntiCA.key -CAcreateserial -out your_device_fqdn_or_ipaddress.pem -
days 1024 -extfile extensions.ext
```

Signature ok

```
subject=C = US, ST = OH, L = Aurora, O = NTI, CN = 192.168.3.144, emailAddress =
sales@ntigo.com
```

Getting CA Private Key

To verify the web server certificate contents, use the following command:

```
# openssl x509 -in your_device_fqdn_or_ipaddress.pem -text
```

Key values to look for are:

```
Subject CN=192.168.3.144
Issuer CN=NTI CA
```

3. Uploading a Self-Signed Certificate Authority to a ENVIROMUX Device

You should import the “ntiCA.crt” file located in the /usr/local/ssl/ntiCA/CA directory that is generated using this procedure into the ENVIROMUX. To import this file into the ENVIROMUX, you must log into its web interface.

On the ENVIROMUX Web Interface menu Under “Administration” select “Security”. In X509 certificates, select “Choose File”, select the CA certificate file ntiCA.crt, and click “**Upload CA certificate**”.

4. Uploading Server Certificate to a ENVIROMUX Device

The NTI ENVIROMUX web server expects the certificate and key as a single file in "PEM" format.

Use the following command to combine certificate and key file to a single file with extension "pem".

```
cat ./server/keys/your_device_fqdn_or_ipaddress.key your_device_fqdn_or_ipaddress.pem > server.pem
```

On the ENVIROMUX Web Interface menu Under "Administration" select "Security". In X509 certificates, select "Choose File", select the server certificate and key file, and click "Upload **Server certificate and key**".


The following is an example of what the **server.pem** file should look like:

```
-----BEGIN RSA PRIVATE KEY-----
MIIEowIBAAKCAQEAXkmpFfVwbJymSP2Pos/+NIDQvmoIU4xv2FBZBu0rc+uRkF1D
y2VeFKlMufp2JXMTxSHXCOjyZgvVEH9jb1VORU6WRz2/6VG5HyDqFa8dptC9YJ2S
yRUA6STObwsZCCHMF6Qxk/1r en59rtckYpygz7/VdCNAhgcoLoIHRoJFTLwONMF
MTt1kw1cNXTSBT//s5jTYofba7qck1HpsRTPdwoHwaJnoyH9t/I/JnFdtJJu3IQN
qna9G3pqdoi/J3Nug2CNkrSLJutBTAmLQsJjU1mwq4MvcpWURATNOwnngAhuX1
t694QVI8owZ+bycidujGSmdr3GUQ4i6/97sdeQIDAQABoIBAEHVle/xDFwM3k
bBGRzRetwJ3Vna5nbtq01k6RIiave61JOPK/FkovjIQAUSKGF0tFeI6sSKr+Ez8
1Bn2Eayr4SzaAuEOznQ7Qvzq1bcm/ji5wd/1DgmGFmtzVjmj6CXye+y5siggfGx
woxKL412J13jDsy7q6G2hQ7Q2dzvt1EFRBazvBdq5LjPcRnZxzqBZGXCMUS/ro9
Iww1xzpkUce0IDG27wqpsFA7DSzwoUq8gSkIGNxe643pBGFJYL0z4+00DyFiaete
iqN9u1hgrw6Avw0/Mt15icsdPZgtq6Az1/tcT5y89zkyanHETxho5j10v1Pi
+iYCyu0CgYEA5jJXHAXcdmZDBSju1n8D1nyr87CSac7DEG4Oo2S1fBL93rue62Cu
cPuyy8gOFFkTmbxd1dztxmQww+VMwxZ8jBSH81VexgqkiYgTy1dde/Ih6v94ccu
nFioUwU92BRwt7zf3y6AhrR2blFUCBrNqsCdPC57QuYKkPlwiCjzUNScgYEA2rUK
w8u3d0pFesJyttxv1BHSVL1BN7wsAcO2RC9qkevEPacjMmSCzJpgiA6jpmw1za9b
AFU1ZACTkHkw7gd8xb7H0jKcPh4FN+Y09SxEWUE/xetznrv4vobpJbzZHHdG7cub
jvaYCDM6UuQLPX1Up5RuwuwnMac6FdVjQkT14TScgYEA1Lu03v/ZbanRVHLCa7ZD
wk0Cnzj9hcSrZgkfiOzmZZxTer4dLd7yNr2U1v1LGYTy09F9GICEC38X1fWpN1YH
pZb0RUuIBLut0QJk92BwK56IPkFG5CC2nocncgCe75KUNUBacTG7w0F0873KuBa1
HG7YaJ11ZTscbs/nvB1EBuMCGyAXddaUplEbbjYwmm5VHZRHtVmsT651S9QeHK1
wbhwysmt/tgBsdJUDc1KrvSjG8dJLxq+E4WfyNrTwo15IwhuLebe5XTPHDOHGVCYF
QChc70i5Iizkfb1kpqVv0PzrEhXkr34TsdR0Rkp+ySSB+iANRdp3JicfmcbbTLPI
CVnuvQKqCps56xdhxJMD6wgeutq9gQOQ80g+VTMwHmIuExw90tH+jCKTRmuz3W
57MgnUljPctusLig+exnuG8fxy4671ck7nAgs1Dr0zGjPpiX2BZF5AhuocwCk1wc
3LwF4AnRw4VgCUSTBSzEIOsDai/4oqbz65Ry2ZpXYzn5jPqFQqs
-----END RSA PRIVATE KEY-----
-----BEGIN CERTIFICATE-----
MIID4TCCAsmqAwIBAgIJAJMjatDg7g/aMA0GCsgSIB3DQEBcUwAMIGCMQSwCQYD
VQQGEwJVUzELMAkGA1UECBMCT0gxDzANBgNVBACTBkF1cm9yYyTEHMB8GA1UECHM
YTMv0d29yayBUZWNobm9sb2dpZXMgSw5jMRQwEgYDVQQLExtFbmdpbmV1cm1uZzZEP
MA0GA1UEAxMGTlRlIENBMSUwIWyJKoZIhvcNAQkBFHdqXN0aw4uzmvyvcm1AbnRp
Z28uY29tMB4XDTEwMZE4MzkzN1oxDTIxMDkymjE4MzkzN1owgaIXCzAJBgNV
BAYTA1VTMQSwCQYDVQQIEwJPSDEPMA0GA1UEBjMGMGMGMGMGMGMGMGMGMGMGMGMGM
ZXR3b3JrIFRlY2hub2xvZ2llcyBjb2MxZDAsBgNVBAsTC0Vuz21uzwvyaw5nMRUR
EwYDVQQDEwXOTIUMTY4LjMUNZEXJTAjBkgqhkig9w0BCQEWfmp1c3Rpb15mZXYy
aUBudGlnby5jb20wggeiMA0GCsgSIB3DQEBQUAA4IBDwAwgGEKAoIBAQAQDEqakv
+9ZsnkZI/Y+1z/40gNC+aghtjg/YUFkG7Stz65Ep/UPLZV4UqUy5+nY1cXPFIcDI
6PJmBVUQF2NvvU5FtpzHPb/pubmFgoovrX2m0L1gnZLJFRrpJPrvBjKIIcx8TpdG
T/wt6fn2u1yrinkDPv9v1w0CGByguggdGgkVMVDQ0wUx03WRbvw1dNIFP/9LmNNG
59trupyTuelJFM91Y4fBqoeJif238j8mcv20km7cha2qcD0be1B2iL8nc26DY10q
tIsm60G1MCYtCwmNSwbCdgy9zG1ZREBM05aecYCG5fW3r3hBUjyJbn5vJy1SMZK
Z2vcZRd1Lr/3ux15AgMBAAGjHjACMAkGA1UEdEQCMAAAwDwYDVR0RBAGwBocEwkdG
RZANBgkqhkiG9w0BAQsFAAOCQEAFM6WkCwdU1ARIKc8tm4b19Gma7VEC+69CqCo
GkiZ4wBEYf1bc265uH7Lz+/z88rdf1xw9B5xc2B2GCzCXPYIwLchfZpxbf6C7kp2
bs20HzvcTglUvwm+r51bjmqz2ZUQVH5VMZP8ct7HboZbhtc6KwFRF1w5CZSu1ghn
tfxBEfiQGaR7wNTUEk9B4LJ3ghSNBYC+gPXOCQSK3taxq1ua5fx08/6QBULQqba
Fzosbstnc7INpqtK90Zuotw03HAnr+gzJb3i4XQK5BREu1CLh1ky6X36P4hf1rh
rf6da7kdfkC0g3x6B1EJzR/Cmazfmutd/AKKpVFT25YKE78jMq==
-----END CERTIFICATE-----
```

5. Accepting a Self-Signed Certificate Authority as Trustworthy

How to add a Self-Signed Certificate Authority as a Trusted Root Certification Authority on Windows


The browsers must recognize and trust the Certificate Authority created. The following are directions for trusting the newly created CA.

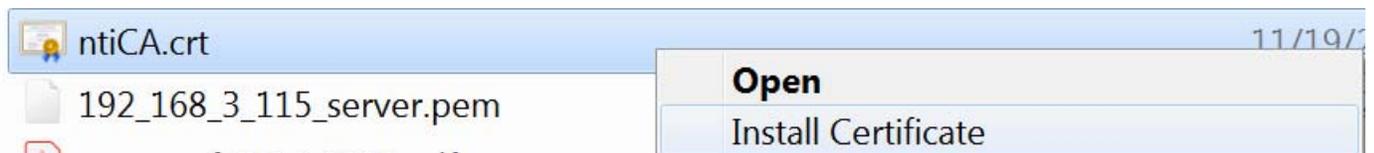


1. Right click on "ntiCA.crt" on the PC. Choose "Install Certificate".




2. There will be a wizard to guide you through the next steps. Click **"Next"**.

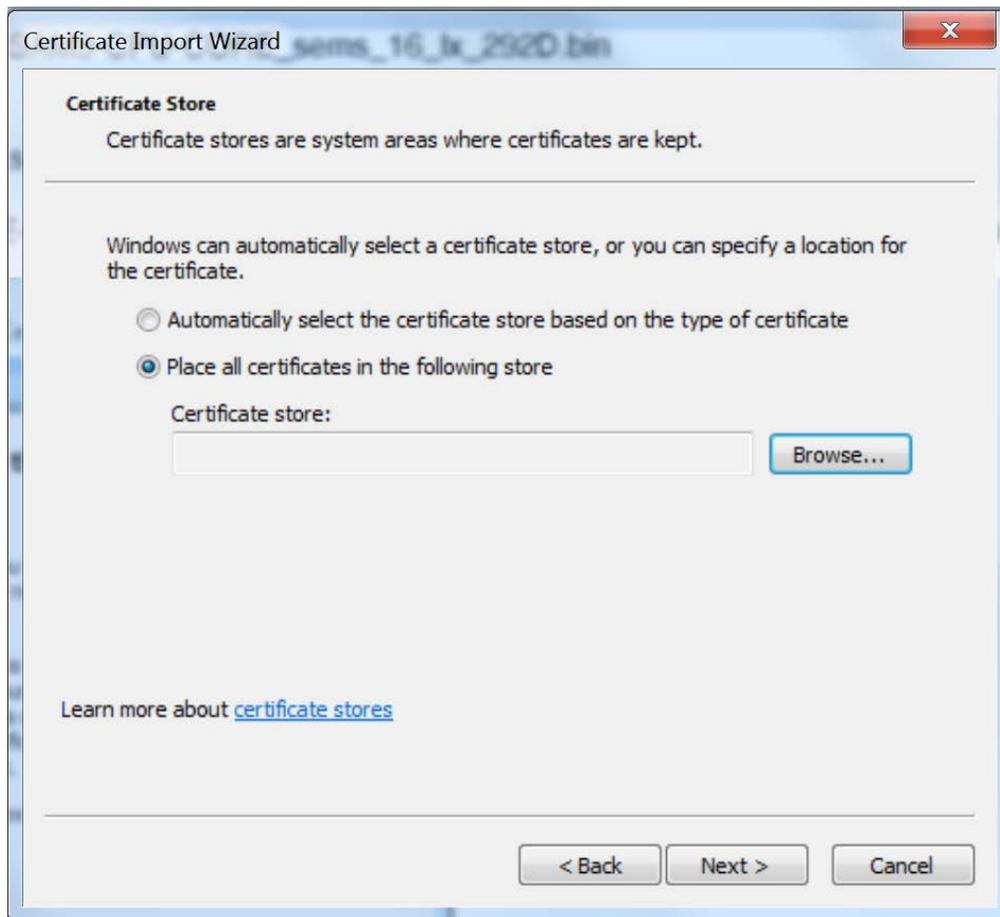


3. Click **"Browse"** and then.....

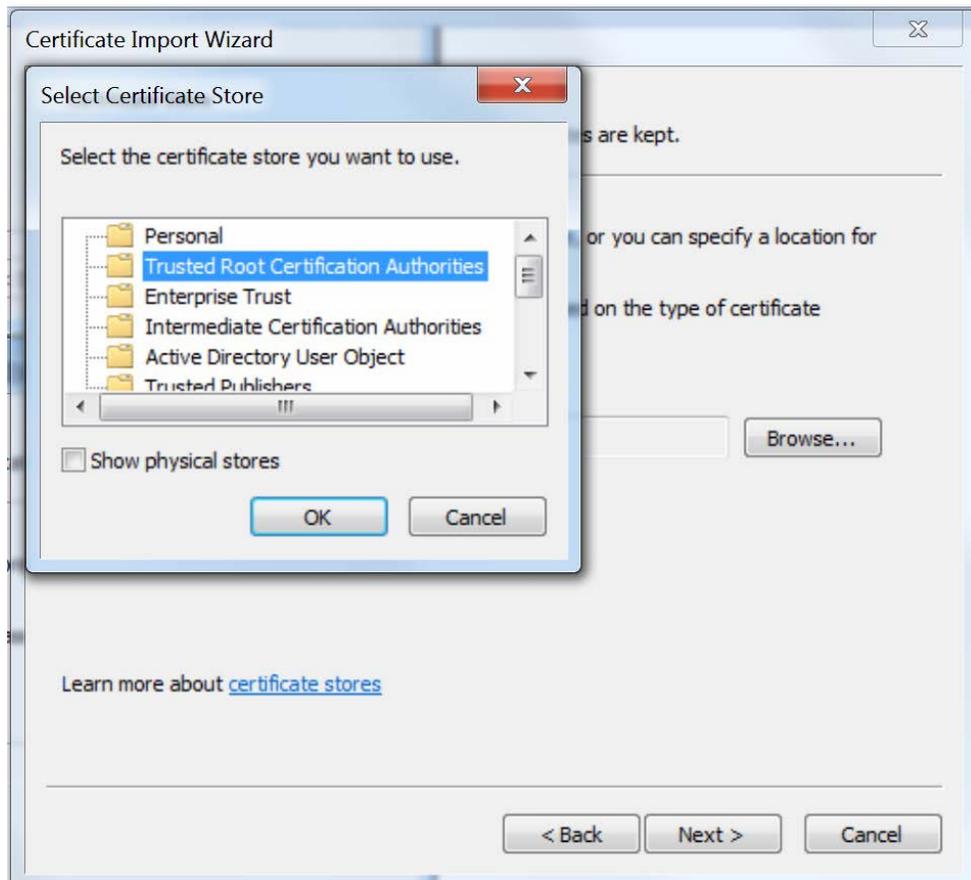

.....select "Trusted Root Certification Authorities"

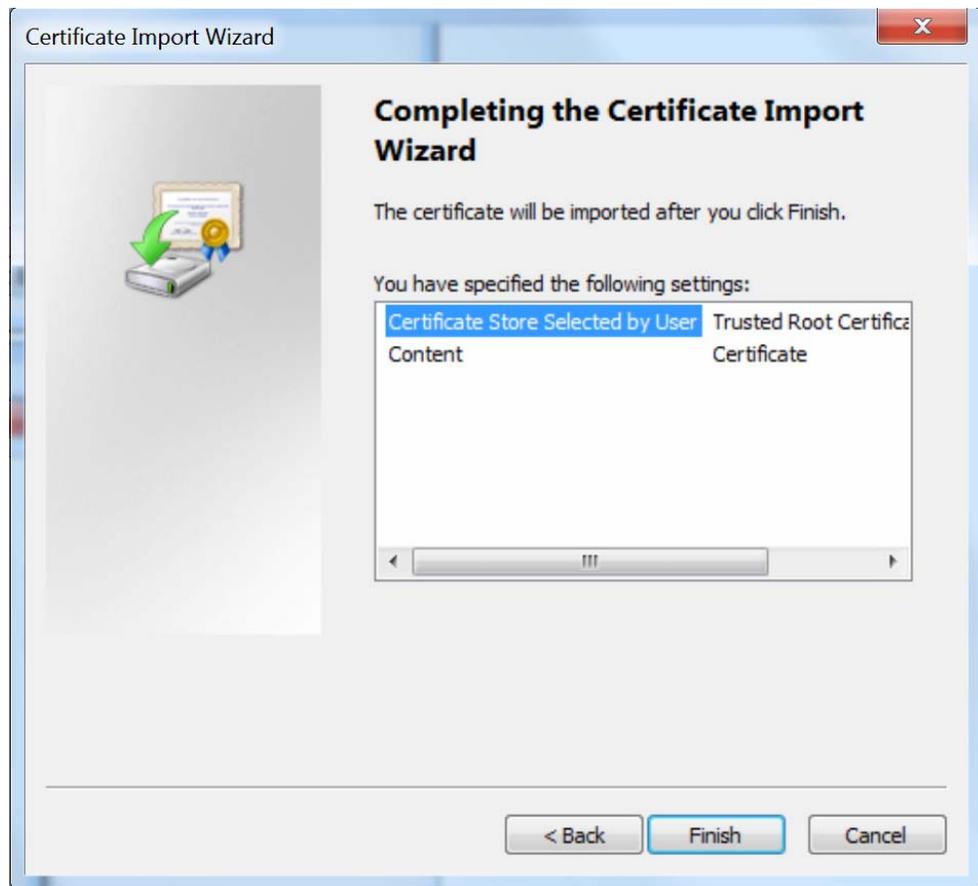

4. Click "Finish" to complete.

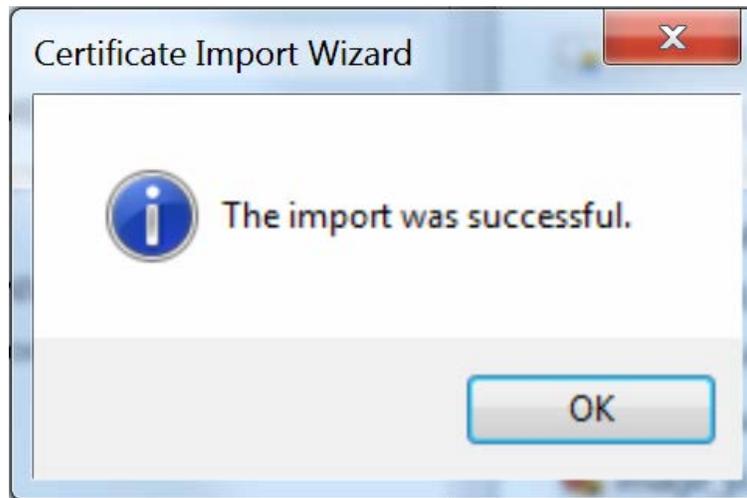

5. You are done! Restart the preferred browser.

How to add a Self-Signed Certificate Authority as a Trusted Root Certification Authority on Mozilla Firefox

Mozilla Firefox does not use Window's Certificate Authorities. For the Firefox browser to recognize your CA, do the following:

1. Open the Mozilla Firefox browser.
2. Type "about:preferences#privacy" in the URL field of the browser.
3. Under "Security" in the "Certificates" section, press the "View Certificates" button.
4. Navigate to the "Authorities" tab.
5. Select "Import"
6. Find your self-made CA and press "Open"
7. Select "Trust this CA to identify websites" and click "OK".
8. Restart the Firefox browser.

Note that some of these directions may be slightly different for older versions of Firefox.

II. Using External CA Signed Certificates for ENVIROMUX Series Products

1. Creating a certificate signing request for External Certificate Authority

A Certificate Signing Request must be provided to an external Certificate Authority like DigiCert, Verisign, or Comodo.

The Certificate Signing Request should be made using the following command:

```
# mkdir thirdparty
# mkdir thirdparty/certificates
# mkdir thirdparty/keys
# openssl genrsa -out ./thirdparty/keys/server.key 2048
# openssl req -sha512 -new -key ./thirdparty/keys/server.key -out
./thirdparty/certificates/server.csr
```

Below is an example of a valid certificate signing request:

```
-----BEGIN CERTIFICATE REQUEST-----
MIIDGzCCAQMCAQAwgawXCzAJBgNVBAYTA1VMTQswCQYDVQQIEwJPSDEPMA0GA1UE
BxMGQXVyY29tMjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5
BgnVBAStC0Vuz21uzwvyaw5rMR8wHQYDVQDEx23d3cubmV0d29ya3RlY2hpbmMu
Y29tMjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5MjE5
BgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAzC1BU6EbJL4hNYj9uFM2EO2qzTHR
c/OUL8kaoZZyExpnk3ekr1GwSTCiv3HP4ZY+A1xuyOP5pzwwnIGXzBHgw0XybIgm
/IrArIEzrh8jw+kKUCjcbHP1DQXES7EhX1LMDONYTVEaIXF5Ya8RWJMXisrd4VTFc
eCm3zquq1HN4rmy4Uj4EN7fsDrT2QppC1PKvFiFaFdwAsi7GXA8q2Gffx5mfhPiw
yb5qAPPx78f6wTyk/MeasUDVDC5DH10L87MfykMLhc+1tLI0xUSKu0NJYczuc/g0
0Auk+khgkH5gau9t83lCTHEI60kHswNR8P9eHSHTo0U9XfuoywmpL6ByQIDAQAQ
ocKwJwYJKozIhvcNAQK0MRowGDAJBgnVHRMEAjaAMAsGA1UdDwQEAwIF4DANBgkq
hkig9w0BAQ0FAAOCAQEAAQ2Es1PHsBrPIDwCLZ/9+4htCcgTYIXBb6A7TmvLmnZF
JcyC7/78np+jGbhSmbM9Pgh6DjpcTuIgsSDlwzP9JLgq+5jkn3Lm6tScGCz7YYT
cf6VfTPyCP5GknvqfzfTAPKESj40tIqm/gvyByQzD1CFL4FIghRrYxpbBgp8Pj/
C9S1FZT5XjuS/ixbkm/06Gwz06H6US8PAFMTviSHA0g6i9nhIBWug70e0jwBdhTb
JaqpAIF30rTbq/ikgxzyb4L9bowExyVP/d1dox7vG9egbi4wJjjihuossxFb7Q1J
ODh+CC7uALD5PhLaugg1hi8a1igt1IuiP1B1UztZcg==
-----END CERTIFICATE REQUEST-----
```

Upload your CSR to your Certificate Authority to get the certificate.

2. Uploading Server Certificate to a ENVIROMUX Device

The NTI ENVIROMUX device expects the certificate and key as a single file in "PEM" format.

The server certificate file with extension "pem" should be received by your external CA after submitting a certificate request. Get your server certificate in a .pem or .cer format. Copy your server certificate into another file and add the device key as shown below.

```

-----BEGIN RSA PRIVATE KEY-----
MIIEowIBAAKCAQEAyQ1pn1Rkr3r4w1Cj10jYrFw2+bxqv6wrotMyGfIRZaZkLo5J
1whyb/ufcX2Unc/H5X7wDa3gawr6iJki/dVf8X16gph1crwr+wFAiRs/D7z+B/ew
iam5vqDMTW5mwAmnNaOs23gs0nSEFGiZMewkimJYyyfHjHv2kpw51Hekwr aa8dVJ
dunAhzeTTCdghxHT2p2hsKXARB5m4D0vJv2aecxnRiXvDA/2uggxfXj1l8Scpak
qxijZeqPv+xRvp/jTPI1w1GpmuemJLGS95iF0v8wPUFM3xDR3o8Gcu018eokEEA
lpwNgIRuQcjJh464Z8rbr810+FJPOAHEJ7XufWIDAQAABOIBABSTQHNN8EM7JotO5
HKwqbb4rgonj36seEsZjs51ff9KIBj0rfQsUYyQBjHqp6iLgv5om1+GQREG99M4f
ka2XSBc56u0KxvMuwTh4e/6dwrqHou1fKtrEgE84EYxIPettni2wJ1TipjoarOp
XTf5JTjmlGOYT7lu9kjvBSuIsmptn8xnu1po511zy/Soy3p38gTKwN1n9CnJXo
q9Ltnf1Gvg7JfRhjHFX4AYKJ5ZMNE4Zi4WER4B72wxifPInR01lk0ezrKn5UB+ug
8nXONONXALotv7MCIM+u4cJv8ww3yTb7Mw5isAS9zes9EN5t1cLLh5yFFJyYka16
e2HgpEEcgYEA7XY94+z2Xy48z5ogQERgHCwFv7wP6kUobJGKITcygP0N5jQkSuo
pprTpr4gpVH8v78krPASSdxrmm3UyvmrK5z89T0SQMns1s6HX+vfVshvXmkW3wa6
BCHtA2+YshPTpfeAYK/rUxh/3Rb1FOPTfpiHpmYEWNowyXT2Jg2HPccgYEA2L+D
t6hVfnsCodcr1KE2VGEMLD6l12eubP3/6+MrAggdvqaaBgxuv57swNs7Ys4Fv7V
Eioi/CwDcB4uIIK4mbenw39uu2OZAGceNXomdosg97Vxs7GR76tyC9irei6u0HX2
ySpb5L8CB1PevTP058HVjghkmsrZqx/URx9ALkGcYEAyhZc6YkA0bnp6svCMrUG
MTON209S506h1dbQmWFC30wsixzJ26vaz+oLMwVyd4cgricv8i4QDXL++sIsirr
r3w1EwhczMLcI5e0Qf/C3Fqt8d2pptaP7EXZMH9itJiUx85P5PkSdm/FMuTP1I2n
uYMiYepXNKsNNqsutTokolUCgYAsRWHX/iFhJb/FykDRNORT87Hir5x/XfVADK35
8ZdqBIO1tk3ZGSF/M798CFeeQw1hdqd8QE25hBvNqJvTY7P7EcIDNFIFwYECPho
pqiY1PXU4qCovVo7g981gDn2KNbYCAwOpAwdtp4VK7A1n6hX6w09sa4a/utVDw1
CxavMQKbGfHjvBHD9cKY41kMTYHvNpAxmJatw1EBMyVkfWat+z+e4C+oJzyLuI34e
TPkk8ivxez00c8X241dIBZKbWCLnv3TprVA2UeMu15Ljyu0H4AEznaniH4S2G+Rz
gWwEFZmTlgOR7f7H9uBPponjnzhsAmKBavGwPJvY6PyoPP0tglR
-----END RSA PRIVATE KEY-----
-----BEGIN CERTIFICATE-----
MIIDazCCA1ogAwIBAgIJAMib9H5kqNSpMA0GCsqGSIb3DQEBCwUAMFkxcZAJBgNV
BAYTA1VMTQswCQYDVQIEwJPSEDEMAoGA1UECHMDT1RJM8wDQYDVQQDEwZOVeKg
Q0EXHjAcBgkqhkiG9w0BCQEWD3NhbGZvZG50awdlVlMnVbTAeFw0xODEyMDQyMDA1
MzhaFw0yMTA5MjMyMDA1MzhaMHEXc2AJBgNVBAYTA1VMTQswCQYDVQQIEwZSEDEP
MA0GA1UEBmMGMQXVyb3JhMQwwCgYDVQQKEwNOVEkxfJAUBGNVBAMTDE5Mi4xNjgu
My4xNDQxHjAcBgkqhkiG9w0BCQEWD3NhbGZvZG50awdlVlMnVbTCCASiWdQY3JkZi
hvcNAQEBBQADgGgEPADCCAQocggEBAMknaz5UZK96+MJQ1YtI2Kxvtvml6r+1q6LT
MhnyEwmmzC60SdcIwG/7hXF91J3Ppx+V+8A2t4Gsk+oi2Iv3VX/F9eOKR4nK1kf1h
QIkbPw+8/gf3sImjOb6gze80zrWjPzWjrGd4LDp0hBYImThsJIpIwmsnx4x79pKV
uDR3pFq2mVHVSxbpwIc3k03A4ICyU9qdobcsQeQeZua9L479mHmZ0YscbwwP9r0
IMX1yPpEgqQJKsYic3qj7/sub6f406SNCJRj5rnpisCXrPeyhDL/FqVBT8Q0d6
PBgrtJfHqJBBAJavjYikbKHI44eouGfK26/JdPhst9AIRce17n8CAwEAAMeMbw
CQYDVROTBAIwADAPBGNVHREECDAgHwTAQAOQA0GCsqGSIb3DQEBCwUAA41BAQBd
CNA7H/4DeYR70j13yomN9ajGRU5xbzETNA1Cr+3w+2Yua4ca0do/e9TLwhTC1PH
E1HKrkFyJag5JEE32PT/Pn+gb++/2U94jw7qatqrCwiBoy7yJcZcGEKY0EPjvfuJ
f51savbgwmQGAOLuRr2NLLU9vCYlTpeeTGyc/ve5k3rj0YfACqL5rKa9D7Vgn6r
IwTU13uuvDXP7QzvkGjkuEJkw1g2D1Ms3bw2eJAOC9HA18RCROxm55Z7marqELZJ
glbf3587pcZMQiU21YU9Dj/70RSN1xdyKqG4KNfOxMhKmuAafqIFp+d8D+3xtVSw
h94zxQI77VarHXLswk3e

```

On the ENVIROMUX Web Interface menu Under “Administration” select “Security”. In X509 certificates, select “Choose File”, select the combined server certificate /key file, click **"Upload Server certificate and key"**.

3. Uploading External CA Certificate to ENVIROMUX Device:

```

-----BEGIN CERTIFICATE-----
MIIDTjCCAp4CCQy25JKAce+ddANBgkqhkiG9w0BAQ0FADCBnDELMAKGA1UEBHMCMV
MMXCAZAJBgNVBAGTAk9IMQ8wDQYDVQHEwZBdXJvcmeXITAFBgnVBAOTGE5ldhdv
cmsvgVjag5vbg9nawvZIE1uyZEUMBIGALUECXMLRw5naw51ZXJpbmxcDzANBGNV
BAMTBk5USSBDQTE1MCMGCSqGSIb3DQEJARYwanvzdG1uLmZ1cnJpQG50awdlVlMnV
bTAeFw0xODEyMDQyMDA1NDZaFw0xOTEyMjYyOTYyOTYyOTYyOTYyOTYyOTYyOTYy
UzELMAKGA1UEBmMCMQXzZANBGNVBACTBkF1cm9yYTeHMB8GA1UECHYTMjYyOTYy
ayBUZWNobm9sb2dpZXMgSw5jMRQwEgYDVQLEwtFbmdpbmV1cm1uzZEPMA0GA1UE
AXMGT1RJIENBMSUwIWyJKozIhvcNAQkBFHqzqXN0aw4uzmVycmlAbnrPz28uY29t
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEATUVXiAF44xtBRQ6if1Ch
evpmQJfXhYQL8KtngXGauw1Knp+3S1cu1Yz1HgMSJU//w/srqnoph6Dmkokhb/r
qYt4Kbdec7t8w4onX41tdJz0+7chBBqvon7DYL545/0IrTLpaHnBBJPhxsFEREWU
hw1ix14SqtW40x49eFPJdGsh0RMAESqwk37Jddx440ALrjLCEI82Rv4Mb8V90j8
Jyu1pwHqfuRVMcn3X/yzHiEP7bq17nrFjAM8ohm1OjXhiZAZQRdqfQHGO9zgrct
qJOQVLMw8amwFn213DAZSQdJorF11zox7D2z1BkTYm7gr1E7mzR12uaOf15owqEL
2wIDAQABMA0GCsqGSIb3DQEBDQUAA4IBAQBkxTZ3or7eRLv+Q5U2a4inJ61/ukw9
1ohhu9Ytmopi jt/CueD4q3cu56i6JNyr u4of7Q4ZUSU+JTxxwhh2QCb0+eF+LMEC
NnF/J26pfXQNh30mq1KRLq6EpZ5DedSbrRTB/1EO5zm/ChoyY7boizp/B8+AY4Id
/AU63BULTN2tRL4doNcbEccT537YRDRZTJF85es9q1fTKVA4mBYjE5p9bgdZHCdq
X1iuv5fiELp307y7NLT09nVrRbzS9YHhmmJORP4j75PAxveyfFz93Luqn8kklw
OdzrOXCmGuMVPDilq1Z2ORZVDNw9+AZvk7/1H++EguB5p7y5aP7zpeFN
-----END CERTIFICATE-----

```

Get the certificate of your CA in a *.cer or *.pem format which should be as shown above. Optionally this file may include an intermediate certificate, which would be different from the above root Certificate, in the same file. On the ENVIROMUX Web Interface menu Under “Administration” select “Security”. In X509 certificates, click “Choose File”, select this CA certificate file, and click **"Upload CA certificate"**.

III. Creating a Client Certificate for ENVIROMUX Series Products

The procedure for creating a client certificate is similar to that for creating the web server certificate.

1. Creating a user key

The following instructions create a private key for a user named your_name@example.com. When prompted for the pass phrase, enter a password that you can remember.

```
% cd /usr/local/ssl/ntiCA
% openssl genrsa -des3 -out ./user/keys/your_name@example.com.key 2048
Generating RSA private key, 2038 bit long modulus
...+++++
.....+++++
e is 65537 (0x10001)
Enter pass phrase for ./user/keys/your_name@example.com.key:
Verifying - Enter pass phrase for ./user/keys/your_name@example.com.key:
```

NOTE: When entering the password, the characters will not be displayed and there will not be an indication of what you typed in. An error message will be printed if you do not type the same password in both prompts.

2. Create the user certificate request

1. The following command creates a certificate request for a user with email address: your_name@example.com and common name your_name. When prompted for the pass phrase for the keys in file ./user/keys/your_name@example.com.key, enter the pass phrase that you used to create the user key (e.g. "password").

```
% openssl req -sha512 -new -key ./user/keys/your_name@example.com.key -out
./user/requests/your_name@example.com.csr
Enter pass phrase for ./user/keys/your_name@example.com.key:
```

You are about to be asked to enter information that will be incorporated into your certificate request.

What you are about to enter is what is called a **Distinguished Name** or a DN.

There are quite a few fields but you can leave some blank

For some fields there will be a default value,

If you enter '.', the field will be left blank.

```
Country Name (2 letter code) [US]:US
State or Province Name (full name) [OH]:OH
Locality Name (eg, city) []:Aurora
Organization Name (eg, company) [NTI]:NTI
Organizational Unit Name (eg, section) []:Engineering
Common Name (eg, YOUR name) []:your_name
Email Address [ca@ntigo.com]:your_name@example.com
```

Please enter the following 'extra' attributes
to be sent with your certificate request

A challenge password []:

An optional company name []:

2. Sign the user certificate request and create the certificate

```
% openssl ca -in ./user/requests/your_name@example.com.csr -cert ./CA/ntiCA.crt -keyfile
./CA/ntiCA.key -out ./user/certificates/your_name@example.com.crt
```

Make sure the following line is in your **openssl.cnf**:

```
unique_subject = "yes"
```

If it is not, you should add it on a separate line using any text editor.

3. Check that the request matches the signature

```
Using configuration from /usr/local/openssl/openssl.cnf
Check that the request matches the signature
Signature ok
The Subject's Distinguished Name is as follows
countryName           :PRINTABLE:'US'
stateOrProvinceName   :PRINTABLE:'OH'
localityName           :PRINTABLE:'Aurora'
organizationName       :PRINTABLE:'NTI'
organizationalUnitName:PRINTABLE:'Engineering'
commonName             :PRINTABLE:'your_name'
emailAddress           :IA5STRING:'your_name@example.com'
Certificate is to be certified until Dec  7 14:52:08 2038 GMT (7305 days)
Sign the certificate? [y/n]:y

1 out of 1 certificate requests certified, commit? [y/n]y
Write out database with 1 new entries
Data Base Updated
```

If you receive an error message like the one below, you still should not have issues with signing the certificate. The index.txt.attr file will be generated.

```
Can't open /usr/local/ssl/ntiCA/index.txt.attr for reading, No such file or directory
3079379152:error:02001002:system library:fopen:No such file or
directory:crypto/bio/bss_file.c:74:fopen('/usr/local/ssl/ntiCA/index.txt.attr','r')
3079379152:error:2006D080:BIIO routines: BIO_new_file:no such
file:crypto/bio/bss_file.c:81:
```

4. Verifying the user certificate contents

To verify the user certificate contents, you can use the following command:

```
% openssl x509 -in ./user/certificates/your_name@example.com.crt -text
```

IV. Creating and Importing a Client Certificate for ENVIROMUX Series Products

Web browsers like Firefox and IE can't use the certificates in the PEM format that is generated by OpenSSL . Consequently, we'll need to export the user certificate to file formats that can be imported by web browsers.

1. Generating the client certificate in PKCS#12 format

Firefox and Windows support the PKCS#12 certificate format. Use the following command to convert the user certificate to this format.

NOTE: During the conversion process, you'll be asked for an export password. Enter anything you can remember, but don't let it be empty because the file will contain your private key.

```
% openssl pkcs12 -export -clcerts -in ./user/certificates/your_name@example.com.crt -inkey
./user/keys/your_name@example.com.key -out ./user/certificates/your_name@example.com.p12
Enter pass phrase for ./user/keys/your_name@example.com.key:
Enter Export Password:
Verifying - Enter Export Password:
```

Copy the `your_name@example.com.p12` file in the `/usr/local/ssl/ntiCA/user/certificates` directory to a location where you can access it from your web browser via the file system.

How to Import a Client Certificate on Windows

The browsers must be able to access the client certificate created. The following are directions for using the newly created client certificate.

1. Open "Internet Options" in Control Panel
2. Navigate to the "Content" tab.
3. Select the "Certificates" button.
4. Go to the "Personal" tab
5. Press "Import"
6. Follow the wizard instructions to select the certificate file
7. Enter the password you used to protect your certificate and private key
8. Import the client certificate into the Personal store.
9. Enter the password you used to protect your certificate and private key
10. Click the imported certificate and then on the View button in the Certificate intended purposes group box. Click the Details tab and then the Edit Properties button. Make sure that the Client Authentication option is checked.

Next time you try to access the ENVIROMUX Web Interface, you will be prompted to use the client certificate.

NOTE: You will also have to import the CA that was used to sign this client certificate.

How to Import a Client Certificate on Mozilla Firefox

The Mozilla Firefox browser does not use Window's stores to use and trust certificates. The following are directions for trusting the newly created client certificate.

1. Open the Mozilla Firefox browser.
2. Type "about:preferences#privacy" in the URL field of the browser.
3. Under "Security" in the "Certificates" section, press the "View Certificates" button.
4. Navigate to the "Your Certificates" tab.
5. Select "Import".

6. Make sure you are looking for the correct file type (in the dropdown next to the file name field, the file type should display something that accepts (*.p12) files.
7. Find your client certificate and press “Open”
8. Enter the password you used earlier to generate it and click “OK”.
9. Restart the Firefox browser.

Next time you access the ENVIROMUX Web Interface, you will be prompted to use the client certificate.

NOTE: You will also have to import the CA that was used to sign this client certificate.

V. Configuring an ENVIROMUX Device to Require Client Certificate

On the ENVIROMUX Web Interface menu Under “Administration” select “Security”.

In X509 certificates select the file `ntiCA.crt` and press button "Upload CA certificate".

Select “certificate + login” in the "Mode" field under “User Authentication” to enable the device to ask for a client certificate.

Use https communication.

Note: Before disabling http be sure to verify https client authentication works properly.

Server Settings	
Enable Telnet	<input type="checkbox"/> Enable access to this device via telnet
Enable SSH	<input checked="" type="checkbox"/> Enable access to this device via ssh
Enable HTTP Access	<input checked="" type="checkbox"/> Enable access to this device via standard (non-secure) HTTP requests. HTTPS is always enabled.
HTTP Port	80 Port for standard HTTP requests
HTTPS Port	443 Port for HTTPS requests
Web Timeout	20 Minutes after which idle web users will be logged out (0 disables idle logout)

Save

Don't remove this checkmark until you verify https client authentication works properly

Server settings section of Network configuration from ENVIROMUX web interface

For the complete E-xD product manual with all features and functions, click [here](#).